


■ Specification

1. Current rating: 5A AC/DC
2. Voltage rating: 600 AC/DC
3. Withstand voltage: 1500V AC/minute
4. Insulation resistance: 1000M Ω min
5. Contact resistance: 10m Ω max
6. Temperature range: -25°C to $+105^{\circ}\text{C}$
7. Applicable panel thickness: 0.8~2.0mm
8. Applicable wires: AWG#26-#16
Insulation O.D.: 1.2-3.2mm
9. Circuits:6,7,8

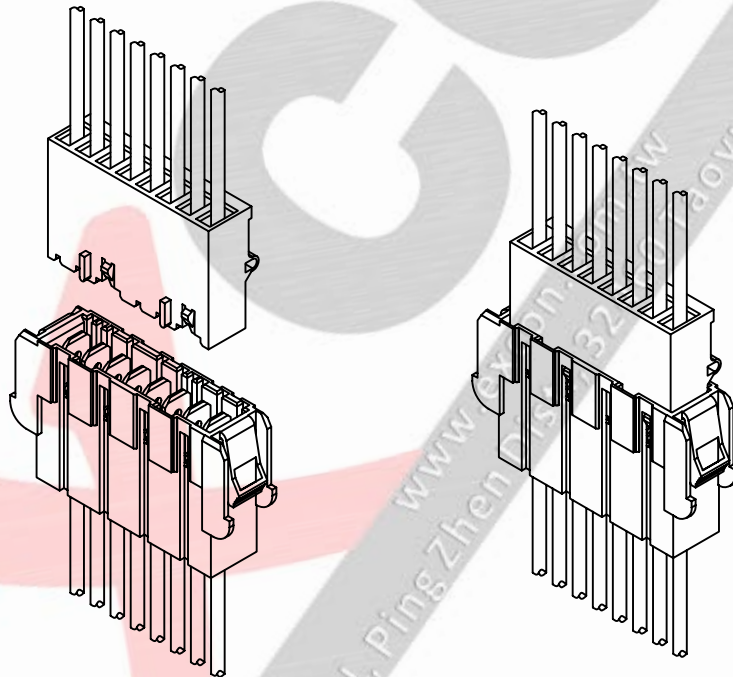

9253HP

Part Code Information:

9253-WW XX YY

① ② ③ ④

① Series Name

② Circuits Number

6,7,8

00 For Terminal

③ Product Type

HP=Housing

④ Material/Finishing/Color

001=NY66 UL94-V0,Natural Color

051=NY66 UL94-V2,Natural Color

Housing (Female)

1. Parts NO: 9253xxHF0x1
2. Part Name: 9250 Housing,Female
3. Material: Nylon 66 UL 94V0/V2
4. Color: Natural
5. Use With: 9250 TA,TX,TW series Terminal

| Circuits | Dimensional Information | |
|----------|----------------------------|--|
| | Female | |
| 6 | 925306HP001 925306HP051 | |
| 7 | 925307HP001 925307HP051 | |
| 8 | 925308HP001 925308HP051 | |