

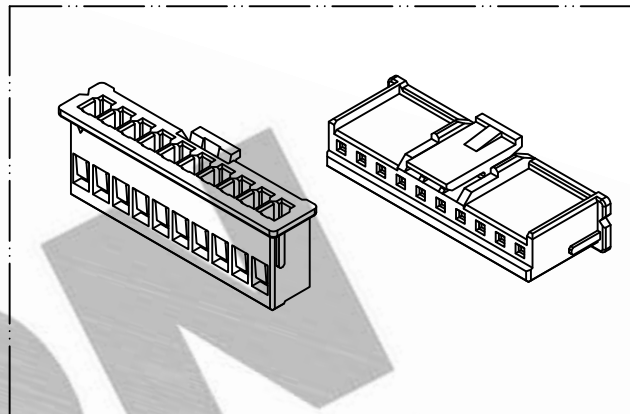


PART NO. 2517xxHA001
 DWG NO. C2517HA

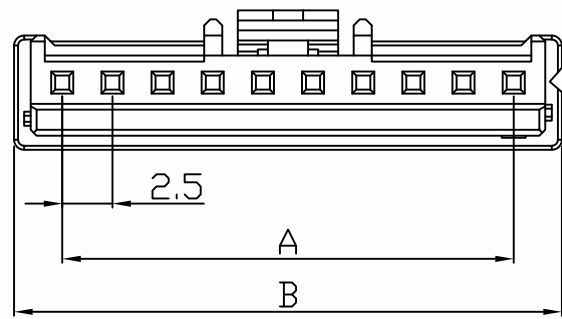

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
251702HA001	2	2.5	7.3
251703HA001	3	5.0	9.8
251704HA001	4	7.5	12.3
251705HA001	5	10.0	14.8
251706HA001	6	12.5	17.3
251707HA001	7	15.0	19.8
251708HA001	8	17.5	22.3
251709HA001	9	20.0	24.8
251710HA001	10	22.5	27.3
251711HA001	11	25.0	29.8
251712HA001	12	27.5	32.3
251713HA001	13	30.0	34.8
251714HA001	14	32.5	37.3
251715HA001	15	35.0	39.8
251716HA001	16	37.5	42.3
251717HA001	17	40.0	44.8
251718HA001	18	42.5	47.3
251719HA001	19	45.0	49.8
251720HA001	20	47.5	42.3

NOTE:

1. Housing Material: Nylon 66 UL 94V-0
2. Insulation resistance: 1000M Ω/min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 3A AC/DC.
5. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



REV.	REVISION	DIS	DATE	DWG NO:	PART.NO
5/1	A	1		C2517HA	2517xxHA001

SCALE: REV. PAGE: UNIT mm
 THIRD ANGLE PROJECTION