
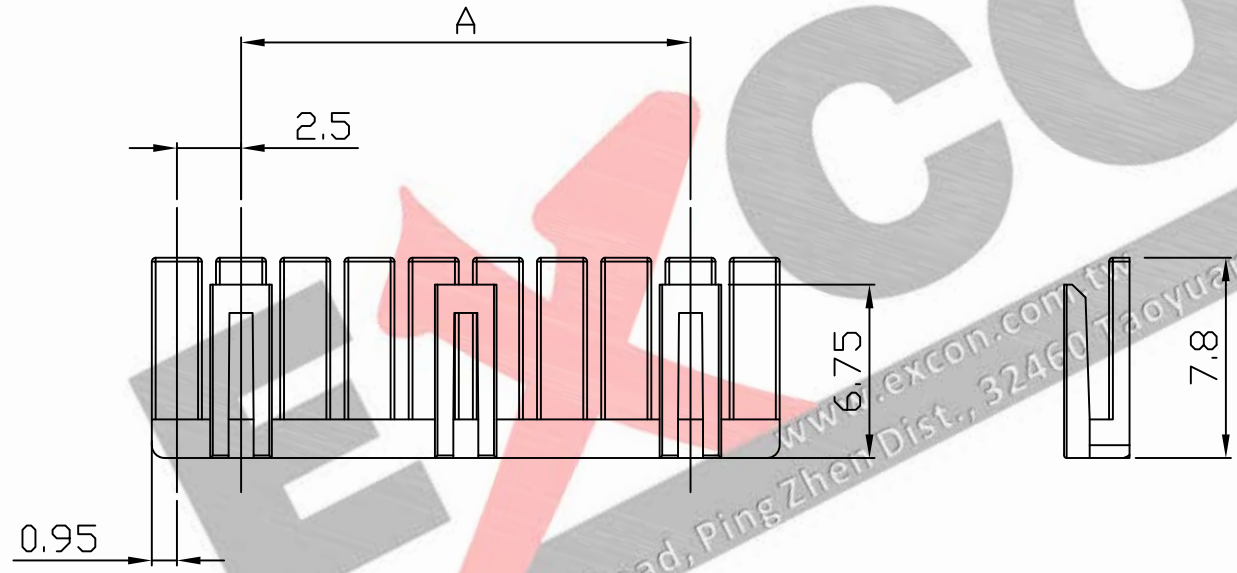
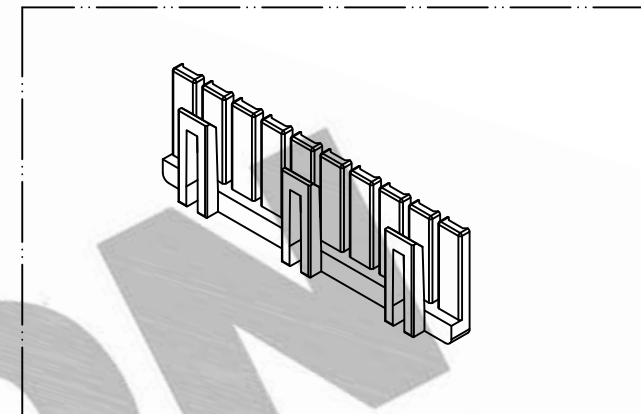


PART NO. 2517xxLA001
 DWG NO. C2517LA

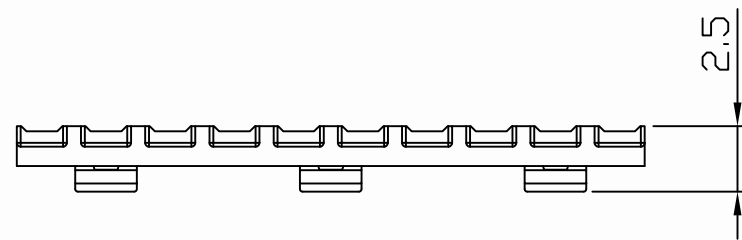

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
251702LA001	2	2.5	4.45
251703LA001	3	5.0	6.95
251704LA001	4	7.5	9.95
251705LA001	5	10.0	11.95
251706LA001	6	12.5	14.95
251707LA001	7	15.0	16.95
251708LA001	8	17.5	19.45
251709LA001	9	20.0	21.95
251710LA001	10	22.5	24.45
251711LA001	11	25.0	26.95
251712LA001	12	27.5	29.45
251713LA001	13	30.0	31.95
251714LA001	14	32.5	34.45
251715LA001	15	35.0	36.95
251718LA001	16	37.5	44.45
251720LA001	17	40.0	49.45

NOTE:

1. Housing Material: Nylon 66 UL 94V-0
2. Insulation resistance: 1000M Ω /min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 3A AC/DC.
5. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ± 0.5 ± 0.10			
2 PLACE ± 1.5 ± 0.35			
1 PLACE ± 2.0 ± 0.50			
ANGLE DIM			
REV.	REVISION		DIS DATE
SCALE	REV.	PAGE:	UNIT mm
5/1	A	1	THIRD ANGLE PROJECTION

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 2517xxLA001