



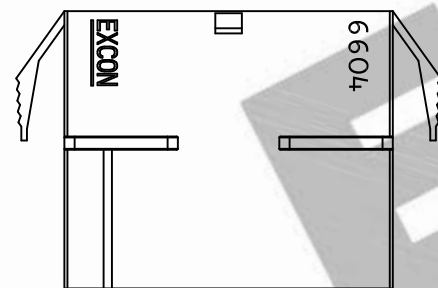
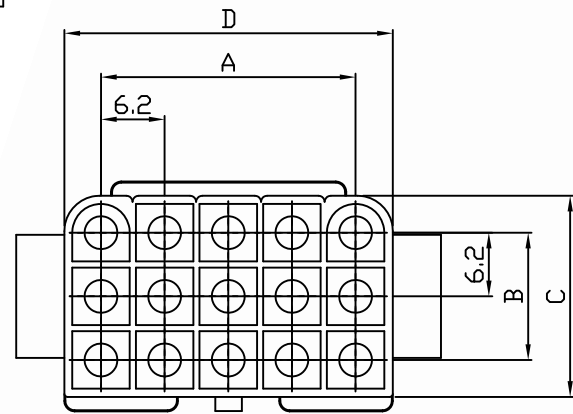



PART NO. 6604xxHP051
 DWG NO. C6604HP

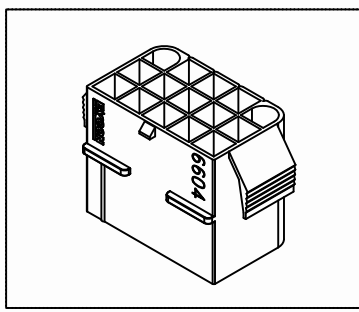


LAYOUT




Part No.: 660402HP051




Part No.: 660409HP051



Part No.: 660403HP051




Part No.: 660404HP051




Part No.: 660412HP051



Part No.: 660404HP051

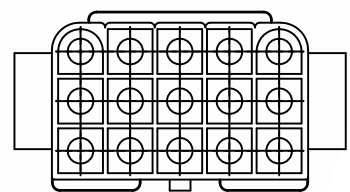

Part No.: 660415HP051



Part No.: 660406HP051

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Insulation resistance: 1000MΩ min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 300V AC/DC
6. Color: Natural

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660401HP051	1	--	--	7.1	7.1
660402HP051	2	6.2	--	7.3	13.8
660403HP051	3	12.4	--	7.3	20.0
660404HP051	4	18.6	--	7.3	26.2
6604A4HP051	4	6.2	6.2	13.6	13.8
660406HP051	6	12.4	6.2	13.6	20.0
660409HP051	9	12.4	12.4	20.3	20.0
660412HP051	12	18.6	12.4	20.3	26.2
660415HP051	15	24.8	12.4	20.3	32.4

SCALE	REV.	PAGE	UNIT	DATE	DWG NO:	PART.NO
1/1	A	1/1	THIRD ANGLE PROJECTION		C6604HP	6604xxHP051

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.35
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

