
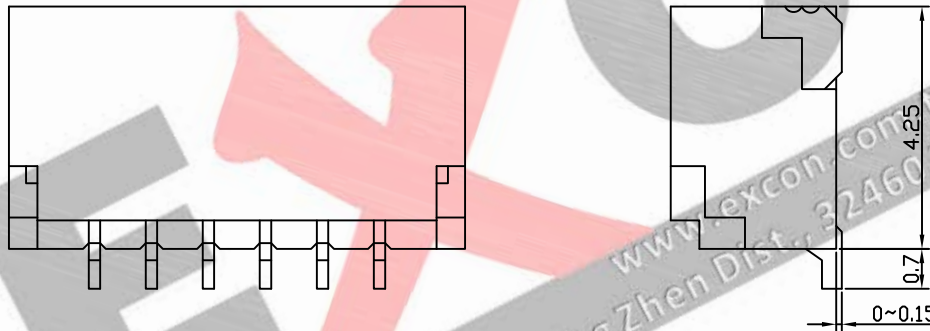
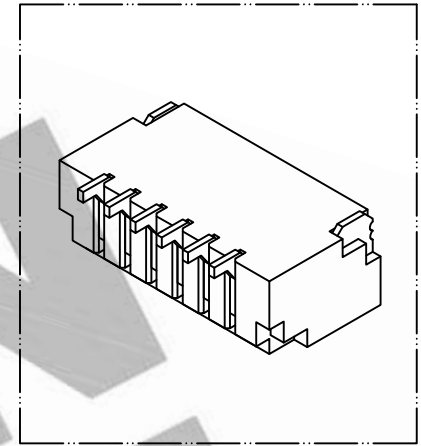


PART NO. 1001xxWE151  
 DWG NO. C1001WE

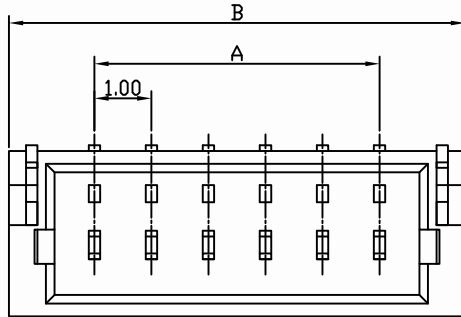


Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
115102WE151	2	1.0	4.0
115103WE151	3	2.0	5.0
115104WE151	4	3.0	6.0
115105WE151	5	4.0	7.0
115106WE151	6	5.0	8.0
115107WE151	7	6.0	9.0
115108WE151	8	7.0	10.0
115109WE151	9	8.0	11.0
115110WE151	10	9.0	12.0
115111WE151	11	10.0	13.0
115112WE151	12	11.0	14.0
115113WE151	13	12.0	15.0
115114WE151	14	13.0	16.0
115115WE151	15	14.0	17.0
115116WE151	16	15.0	18.0
115117WE151	17	16.0	19.0
115118WE151	18	17.0	20.0
115119WE151	19	18.0	21.0
115120WE151	20	19.0	22.0

NOTE:

1. Wafer Material: Nylon 66 UL94V-0  
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 800V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC
7. PIN long: 11.0 mm

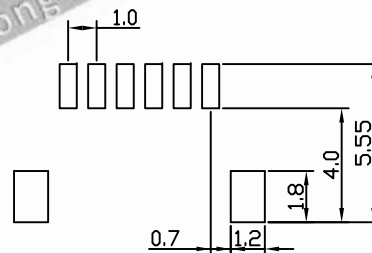

RECOMMENDED PCB LAYOUT  
 (PCB THK=1.0~1.6)

				UNLESS OTHERWISE SPECIFIED TOLERANCES		<b>EXCON</b> EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50		
REV.	REVISION		DIS	DATE		
SCALE	REV.	PAGE	UNIT	TH	DWG NO:	PART.NO
6/1	A	1/1	THIRD ANGLE PROJECTION		C1001WE	1001xxWE151