
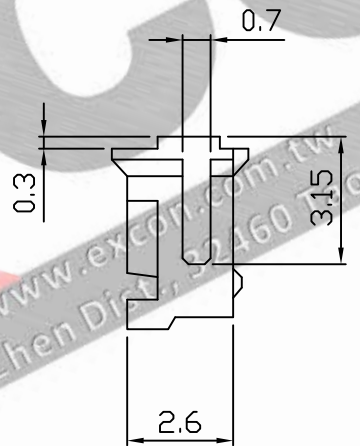
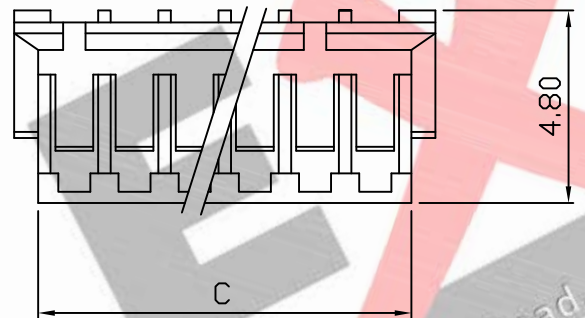
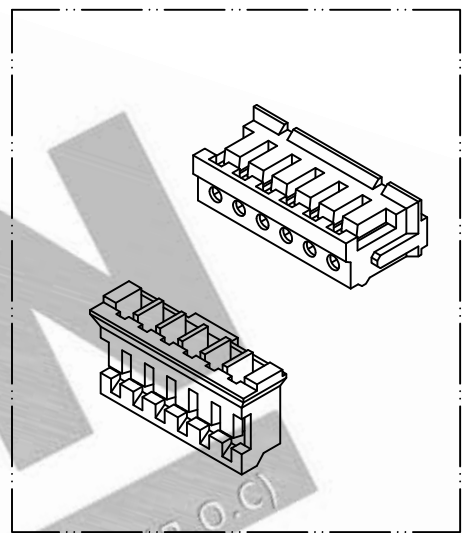
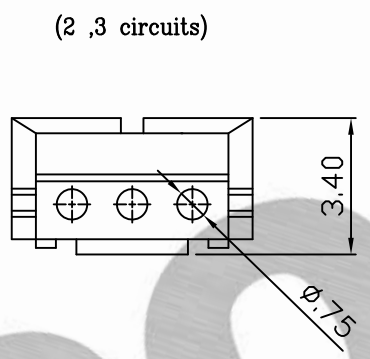


PART NO. 1501xxHA001
 DWG NO. C1501HA

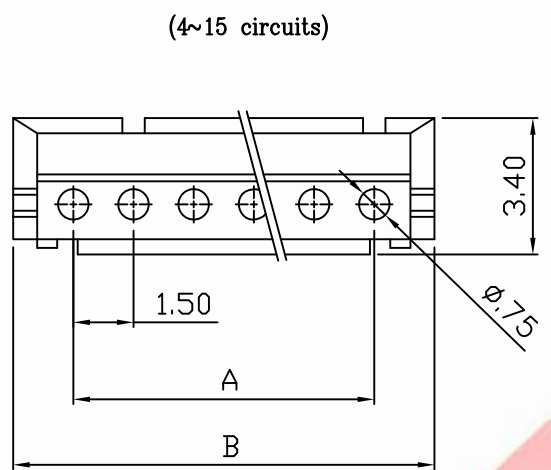

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C
150102HA001	2	1.50	4.50	3.35
150103HA001	3	3.00	6.00	4.85
150104HA001	4	4.50	7.50	6.35
150105HA001	5	6.00	9.00	7.85
150106HA001	6	7.50	10.50	9.35
150107HA001	7	9.00	12.00	10.85
150108HA001	8	10.50	13.50	12.35
150109HA001	9	12.00	15.00	13.85
150110HA001	10	13.50	16.50	15.35
150111HA001	11	15.00	18.00	16.85
150112HA001	12	16.50	19.50	18.35
150113HA001	13	18.00	21.00	19.85
150114HA001	14	19.50	22.50	21.35
150115HA001	15	21.00	24.00	22.85

- NOTE:
1. Housing Material: Nylon 66 UL 94V-0
 2. Insulation resistance: 500MΩ min.
 3. Withstand voltage: 500V AC/minute.
 4. Current rating: 1A AC/DC.
 5. Voltage rating: 100V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		
REV.	REVISION			DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:
5/1	A	1	THIRD ANGLE PROJECTION			C1501HA
					PART.NO	
					1501xxHA001	