
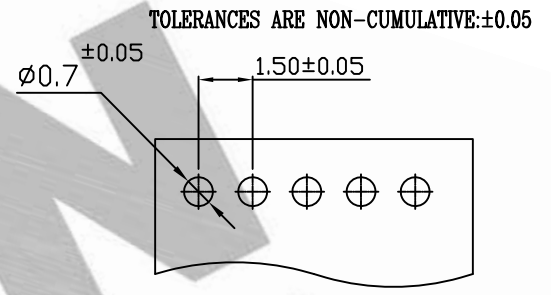
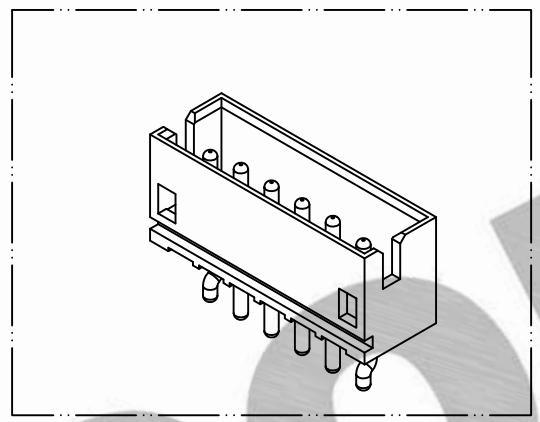


PART NO. 1501xxWV004
 DWG NO. C1501WV

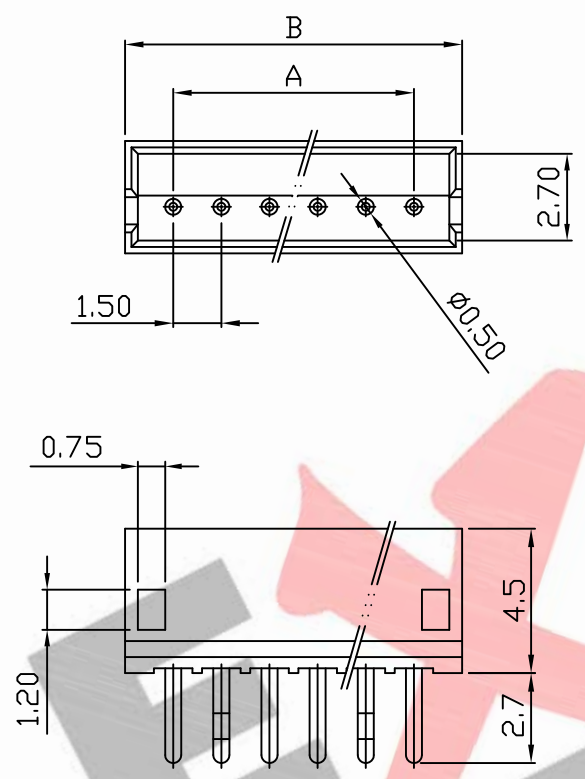

RECOMMENDED PCB LAYOUT
 (PCB THK=0.6~1.2)

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
150102WV004	2	1.50	4.50
150103WV004	3	3.00	6.00
150104WV004	4	4.50	7.50
150105WV004	5	6.00	9.00
150106WV004	6	7.50	10.50
150107WV004	7	9.00	12.00
150108WV004	8	10.50	13.50
150109WV004	9	12.00	15.00
150110WV004	10	13.50	16.50
150111WV004	11	15.00	18.00
150112WV004	12	16.50	19.50
150113WV004	13	18.00	21.00
150114WV004	14	19.50	22.50
150115WV004	15	21.00	24.00

- NOTE:**
1. Wafer Material: Nylon 66 UL94V-0
Pin/Pos Material: brass bronze.
 2. Plated: Tin-plated 50u"min.
 3. Insulation resistance: 500MΩ min.
 4. Withstand voltage: 500V AC/minute.
 5. Current rating: 1A AC/DC.
 6. Voltage rating: 100V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES	
				3 PLACE ±0.5 ±0.10	
				2 PLACE ±1.5 ±0.25	
				1 PLACE ±2.0 ±0.50	
				ANGLE DIM	
REV.	REVISION		DIS	DATE	
SCALE	REV.	PAGE:	UNIT	MM	
5/1	A	1	THIRD ANGLE PROJECTION		

EXCON
EXCON TECHNOLOGY COMPANY

DWG NO: C1501WV
 PART.NO 1501xxWV004