

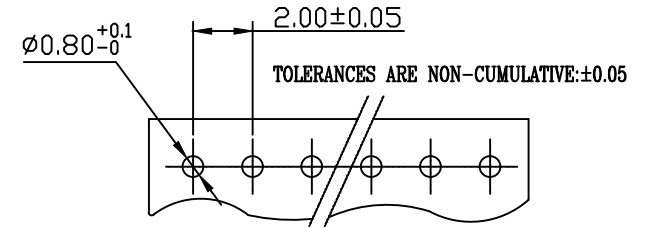
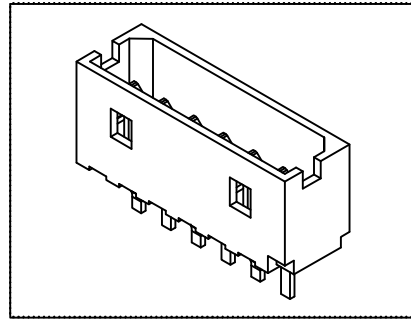
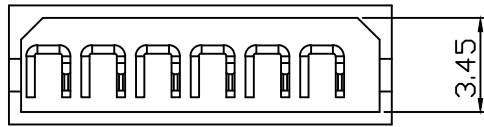




PART NO. 2007xxWV001  
 DWG NO. C2007WV

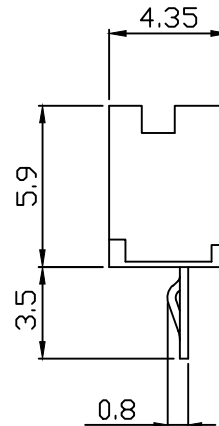

RECOMMENDED PCB LAYOUT  
 (PCB THK=1.0~1.6)

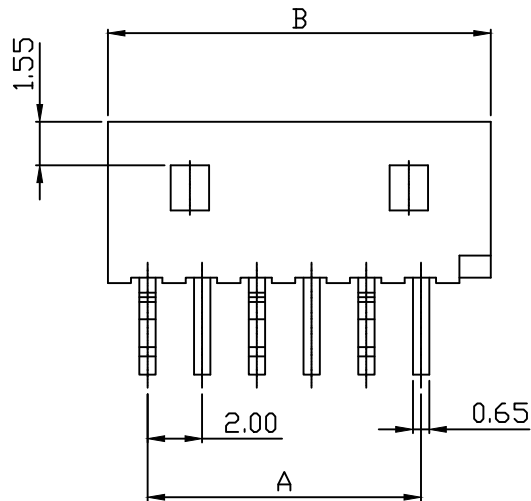

2 Circuits



3 Circuits

Dimensional & Ordering Information:

| Part No.    | Circuits | Dim A | Dim B |
|-------------|----------|-------|-------|
| 200702WV001 | 2        | 2.0   | 6.0   |
| 200703WV001 | 3        | 4.0   | 8.0   |
| 200704WV001 | 4        | 6.0   | 10.0  |
| 200705WV001 | 5        | 8.0   | 12.0  |
| 200706WV001 | 6        | 10.0  | 14.0  |
| 200707WV001 | 7        | 12.0  | 16.0  |
| 200708WV001 | 8        | 14.0  | 18.0  |
| 200709WV001 | 9        | 16.0  | 20.0  |
| 200710WV001 | 10       | 18.0  | 22.0  |
| 200711WV001 | 11       | 20.0  | 24.0  |
| 200712WV001 | 12       | 22.0  | 26.0  |
| 200713WV001 | 13       | 24.0  | 28.0  |
| 200714WV001 | 14       | 26.0  | 30.0  |
| 200715WV001 | 15       | 28.0  | 32.0  |

NOTE:

4~15 Circuits

- Housing Material: Nylon 66 UL94V0  
Pin/Pos Material: brass bronze.
- Plated: Tin-plated 50u"min.
- Insulation resistance: 1000MΩ min.
- Withstand voltage: 800V AC/minute.
- Current rating: 2A AC/DC.
- Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 3 PLACE ±0.5 ±0.10  
 2 PLACE ±1.5 ±0.35  
 1 PLACE ±2.0 ±0.50  
 ANGLE DIM

**EXCON**

EXCON TECHNOLOGY COMPANY

| REV.  | REVISION | DIS  | DATE |
|-------|----------|------|------|
| SCALE | REV.     | PAGE | UNIT |
| 4/1   | A        | 1/1  | mm   |

DWG NO:

C2007WV

PART.NO

2007xxWV001

A

A