
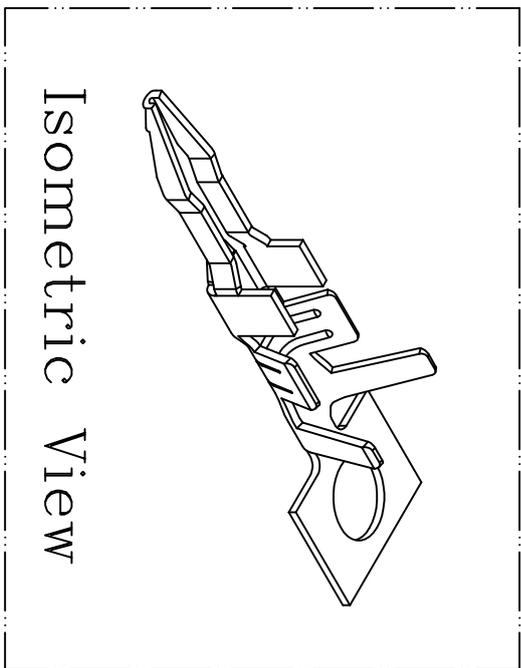



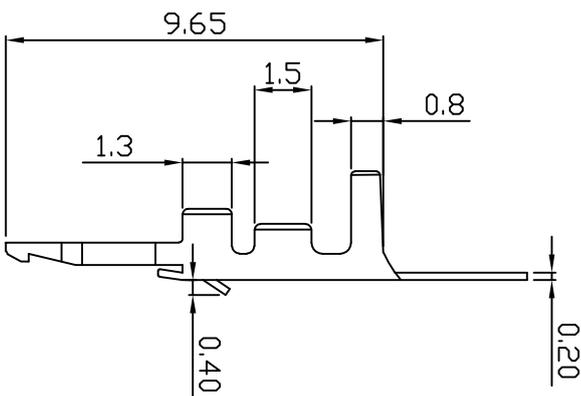


PART NO. 250200TCxx1
 DWG NO. C2502TC

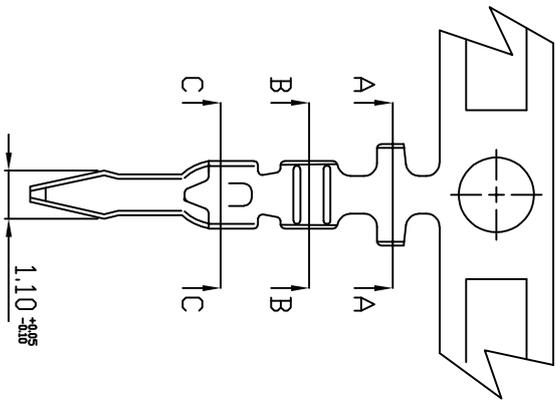

NOTE:

1. Terminal Material: Brass bronze or Phosphor bronze
2. Plated: Tin pre-plated or Tin-plated 50u"min.
3. Current rating: 3A AC/DC
4. Voltage rating: 250V AC/DC
5. Withstand voltage: 800V AC/minute
6. Insulation resistance:1000MΩ
7. Applicable wires: AWG#28-#22
8. Insulation O.D.: 1.2-1.9mm
9. Q'ty / reel:10,000pcs

SEC A-A

SEC B-B

SEC C-C

Ordering Information and Dimensions:

Part No.	Material	Finishing
250200TC001	Brass	Tin plated
250200TC051	Brass	Tin pre-plated
250200TC301	Phosphor	Tin plated
250200TC351	Phosphor	Tin pre-plated

UNLESS OTHERWISE SPECIFIED TOLERANCES

3 PLACE	±0.5	±0.10
2 PLACE	±1.5	±0.25
1 PLACE	±2.0	±0.50

ANGLE DIM

REV.	REVISION	DIS	DATE
D	1. NOTE: 新增 第3、4、5、6项 2. 新增壁厚 TO.20		5/12 2015

SCALE	REV.	PAGE:	THIRD ANGLE PROJECTION
5/1	D	1/1	

DWG NO.:	PART NO.
C2502TC	250200TCxx1



EXCON TECHNOLOGY COMPANY