

PART NO. 2510xxWR001  
 DWG NO. C2510WR




F

D


C

B


A

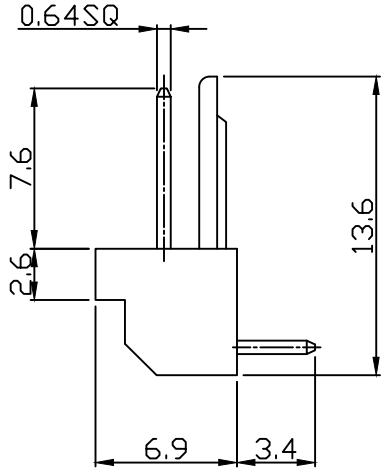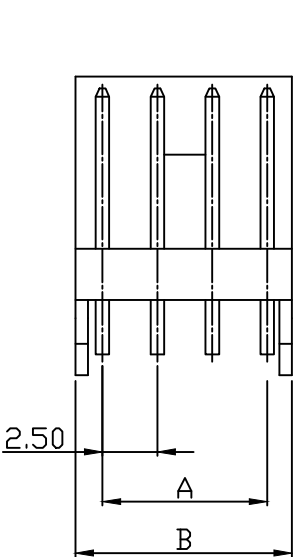

2510xxWR001

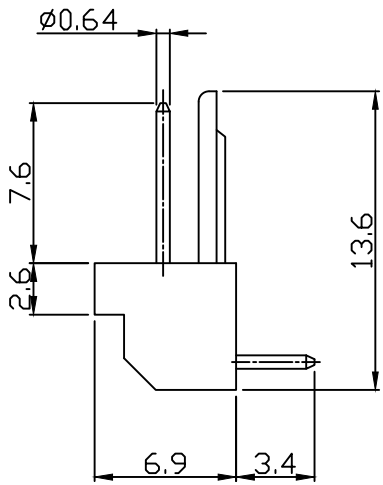

2510xxWL001

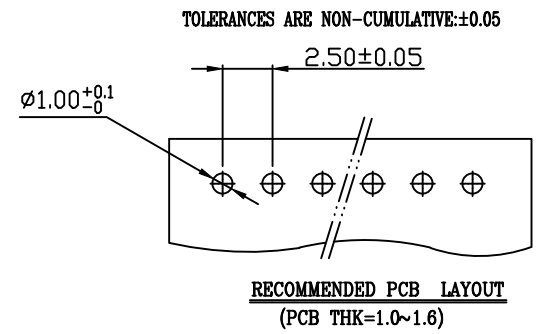

Dimensional & Ordering Information:

Part No.		Circuits	Dim A	Dim B
PIN:Ø0.64	PIN:SQ0.64			
251002WL001	251002WR001	2	2.50	5.00
251003WL001	251003WR001	3	5.00	7.50
251004WL001	251004WR001	4	7.50	10.00
251005WL001	251005WR001	5	10.00	12.50
251006WL001	251006WR001	6	12.50	15.00
251007WL001	251007WR001	7	15.00	17.50
251008WL001	251008WR001	8	17.50	20.00
251009WL001	251009WR001	9	20.00	22.50
251010WL001	251010WR001	10	22.50	25.00
251011WL001	251011WR001	11	25.00	27.50
251012WL001	251012WR001	12	27.50	30.00

NOTE:

1. Wafer Material: Nylon 66 UL94V-0  
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1000V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

REV.	REVISIONI			DIS	DATE
SCALE	REV.	PAGE:	UNIT	mm	
4/1	A	1	THIRD ANGLE PROJECTION		

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 3 PLACE ±0.5 ±0.10  
 2 PLACE ±1.5 ±0.25  
 1 PLACE ±2.0 ±0.50  
 ANGLE DIM

**EXCON**  
 EXCON TECHNOLOGY COMPANY

DWG NO:			PART.NO		
C2510WR			2510xxWR001		