

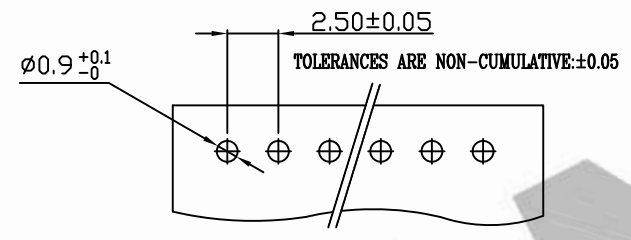
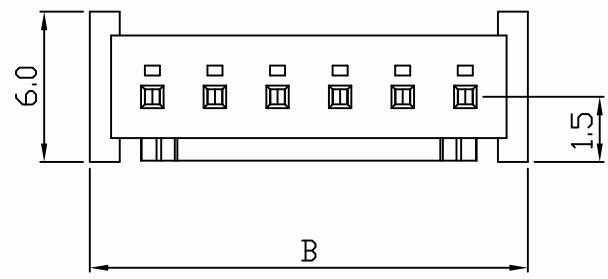
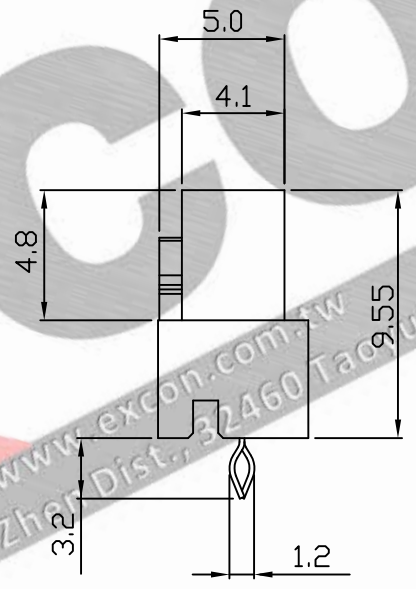


PART NO. 2515xxWV001
 DWG NO. C2515WV

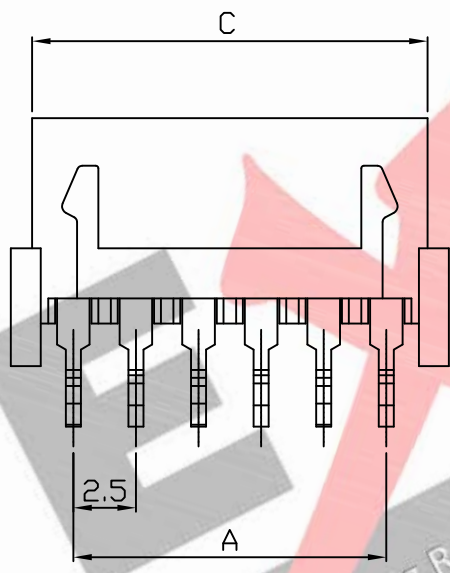

RECOMMENDED PCB LAYOUT
 (PCB THK=1.0~1.6)

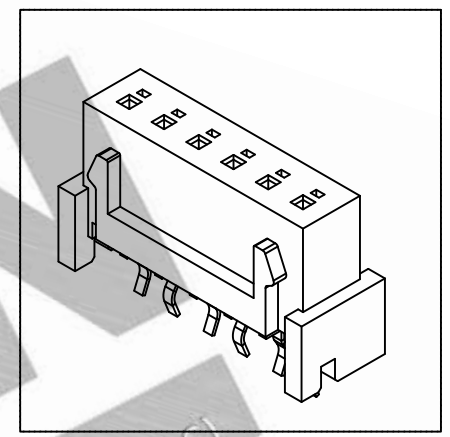

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C
251503WV001	3	5.00	10.00	8.20
251504WV001	4	7.50	12.50	10.70
251505WV001	5	10.00	15.00	13.20
251506WV001	6	12.50	17.50	15.70
251507WV001	7	15.00	20.00	18.20
251508WV001	8	17.50	22.50	20.70
251509WV001	9	20.00	25.00	23.20
251510WV001	10	22.50	27.50	25.70
251511WV001	11	25.00	30.00	28.20
251512WV001	12	27.50	32.50	30.70
251513WV001	13	30.00	35.00	33.20
251514WV001	14	32.50	37.50	35.70
251515WV001	15	35.00	40.00	38.20

NOTE:

- Housing Material: Nylon 66 UL94V-0
Pin/Pos Material: brass bronze.
- Plated: Tin-plated 50u"min.
- Insulation resistance: 1000MΩ min.
- Withstand voltage: 800V AC/minute.
- Current rating: 3A AC/DC.
- Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ±0.5 ±0.10			
2 PLACE ±1.5 ±0.35			
1 PLACE ±2.0 ±0.50			
ANGLE DIM			
REV.	REVISION		DIS DATE
SCALE	REV.	PAGE:	UNIT mm
4/1	A	1	THIRD ANGLE PROJECTION

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 2515xxWV001