
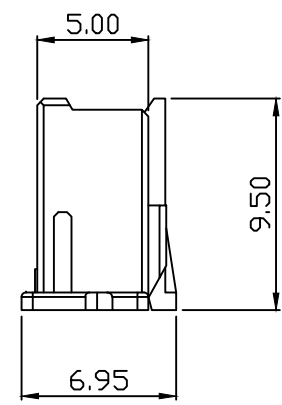
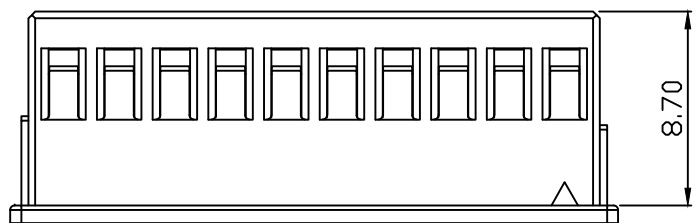
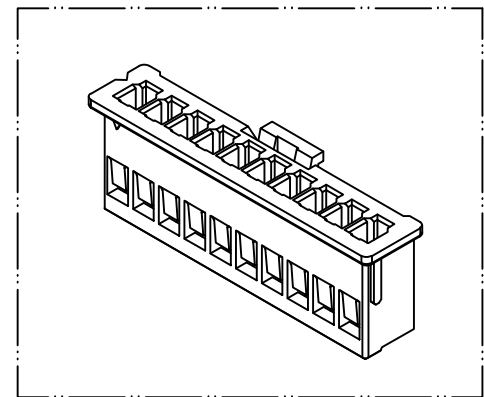


10 9 8 7 6 5 4 3 2 1

PART NO. 2517xxHA001
 DWG NO. C2517HA

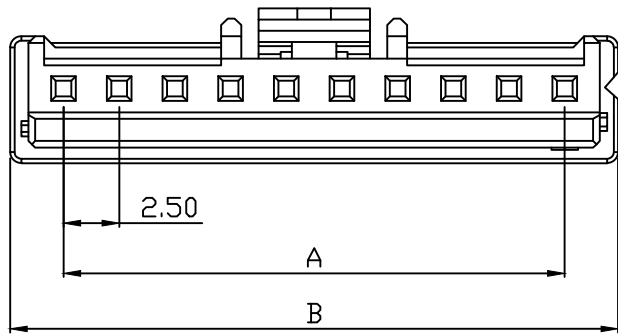

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
251702HA001	2	2.50	7.30
251703HA001	3	5.00	9.80
251704HA001	4	7.50	12.30
251705HA001	5	10.00	14.80
251706HA001	6	12.50	17.30
251707HA001	7	15.00	19.80
251708HA001	8	17.50	22.30
251709HA001	9	20.00	24.80
251710HA001	10	22.50	27.30
251711HA001	11	25.00	29.80
251712HA001	12	27.50	32.30
251713HA001	13	30.00	34.80
251714HA001	14	32.50	37.30
251715HA001	15	35.00	39.80
251718HA001	18	42.50	47.30
251720HA001	20	45.00	49.80

NOTE:

- Housing Material: Nylon 66 UL94V0
- Color: Natrual
- Withstand voltage: 1000V AC/minute.
- Current rating: 3A AC/DC.
- Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



REV.	REVISIONI		DIS	DATE	DWG NO: C2517HA	PART.NO 2517xxHA001
SCALE	REV.	PAGE:	UNIT	m m		
NONE	B	1	THIRD ANGLE PROJECTION			

E
D
C
B
A

F
E
D
C
B
A

10 9 8 7 6 5 4 3 2 1