
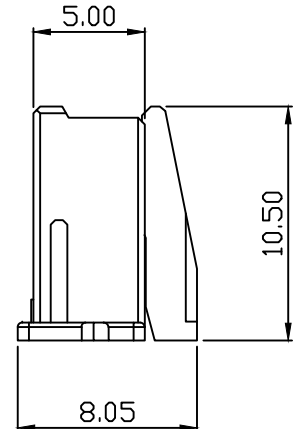
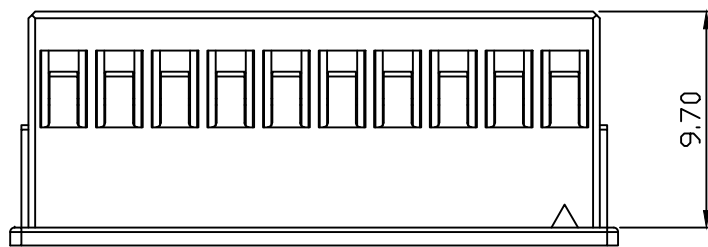
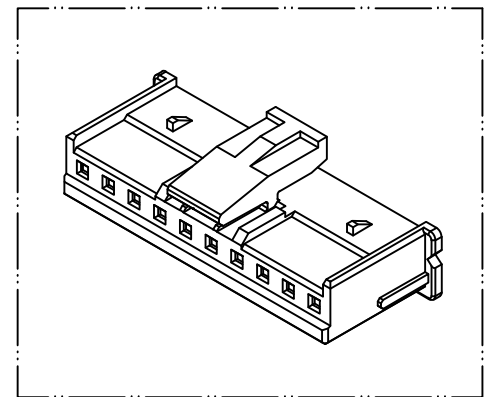


PART NO. 2517xxHB001
 DWG NO. Q2517HB

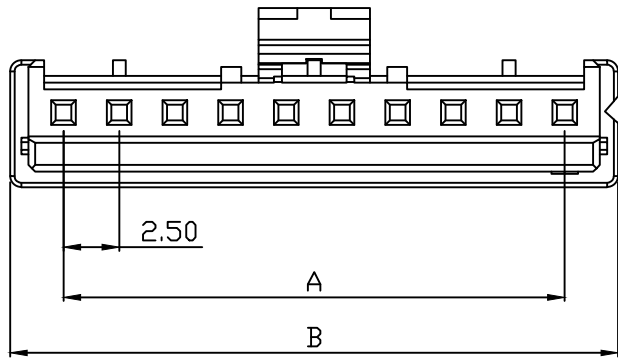

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
251702HB001	2	2.50	7.30
251703HB001	3	5.00	9.80
251704HB001	4	7.50	12.30
251705HB001	5	10.00	14.80
251706HB001	6	12.50	17.30
251707HB001	7	15.00	19.80
251708HB001	8	17.50	22.30
251709HB001	9	20.00	24.80
251710HB001	10	22.50	27.30
251711HB001	11	25.00	29.80
251712HB001	12	27.50	32.30
251713HB001	13	30.00	34.80
251714HB001	14	32.50	37.30
251715HB001	15	35.00	39.80
251718HB001	18	42.50	47.30
251720HB001	20	45.00	49.80

NOTE:

- Housing Material: Nylon 66 UL94V0
- Color: Natrual
- Withstand voltage: 1000V AC/minute.
- Current rating: 3A AC/DC.
- Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		
REV.	REVISIONI			DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:
NONE	B	1	THIRD ANGLE PROJECTION			Q2517HB
					PART.NO	
					2517xxHB001	