

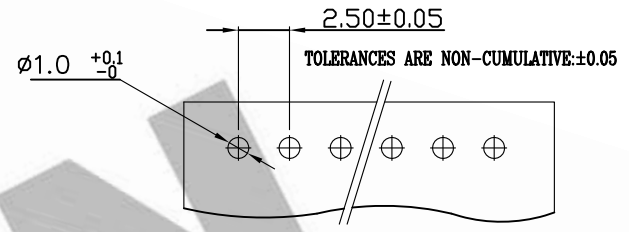
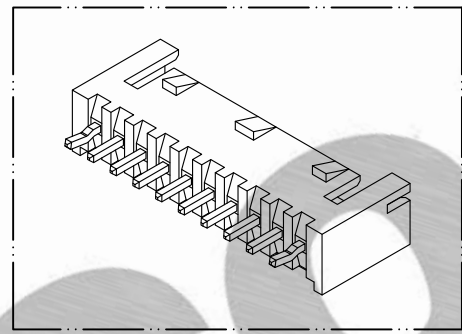
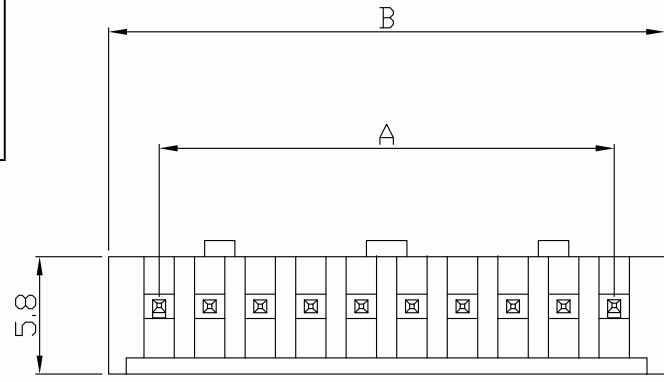


PART NO. 2519XXWV001  
 DWG NO. C2519WV

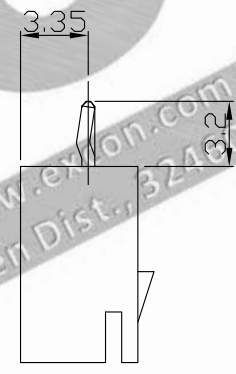

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
251902WV001	2	2.50	7.50
251903WV001	3	5.00	10.00
251904WV001	4	7.50	12.50
251905WV001	5	10.00	15.00
251906WV001	6	12.50	17.50
251907WV001	7	15.00	20.00
251908WV001	8	17.50	22.50
251909WV001	9	20.00	25.00
251910WV001	10	22.50	27.50
251911WV001	11	25.00	30.00
251912WV001	12	27.50	32.50
251913WV001	13	30.00	35.00
251914WV001	14	32.50	37.50
251915WV001	15	35.00	40.00

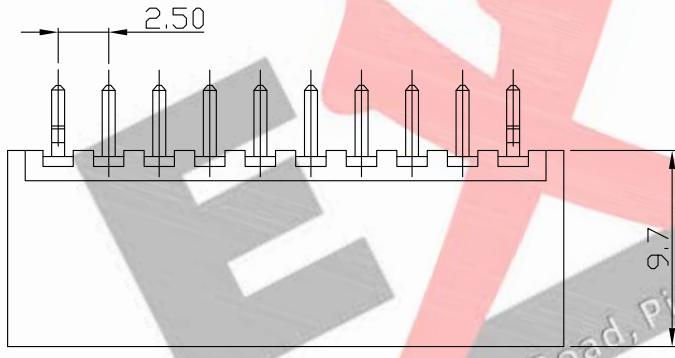

NOTE:

1. Wafer Material: Nylon 66 UL94V-0  
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M Ω/min.
4. Withstand voltage: 1000V AC/minute.
5. Current retang: 3A AC/DC.
6. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		<b>EXCON</b> <b>EXCON TECHNOLOGY COMPANY</b>
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		
				1 PLACE ±2.0 ±0.50		
REV.	REVISIONI			DIS	DATE	ANGLE DIM
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:
5/1	A	1	THIRD ANGLE PROJECTION			C2519WV
						PART.NO
						2519xxWV001