

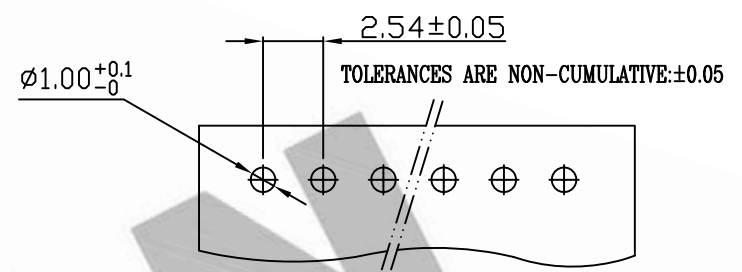


PART NO. 2542xxWV203
 DWG NO. C2542WV

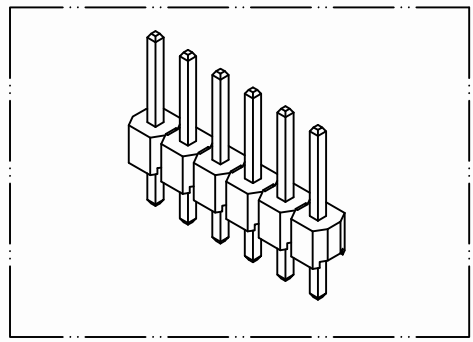

RECOMMENDED PCB LAYOUT
 (PCB THK=1.0~1.6)

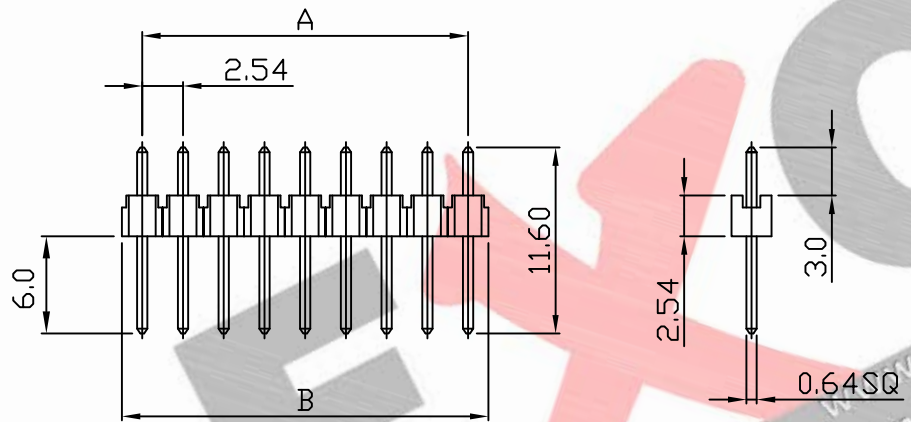

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Part No.	Circuits	Dim A	Dim B
254201WV203	1	--	2.54	254221WV203	21	50.80	53.34
254202WV203	2	2.54	5.08	254222WV203	22	53.34	55.88
254203WV203	3	5.08	7.62	254223WV203	23	55.88	58.42
254204WV203	4	7.62	10.16	254224WV203	24	58.42	60.96
254205WV203	5	10.16	12.70	254225WV203	25	60.96	63.50
254206WV203	6	12.70	15.24	254226WV203	26	63.50	66.04
254207WV203	7	15.24	17.78	254227WV203	27	66.04	68.58
254208WV203	8	17.78	20.32	254228WV203	28	68.58	71.12
254209WV203	9	20.32	22.86	254229WV203	29	71.12	73.66
254210WV203	10	22.86	25.40	254230WV203	30	73.66	76.20
254211WV203	11	25.40	27.94	254231WV203	31	76.20	78.74
254212WV203	12	27.94	30.48	254232WV203	32	78.74	81.28
254213WV203	13	30.48	33.02	254233WV203	33	81.28	83.82
254214WV203	14	33.02	35.56	254234WV203	34	83.82	86.36
254215WV203	15	35.56	38.10	254235WV203	35	86.36	88.90
254216WV203	16	38.10	40.64	254236WV203	36	88.90	91.44
254217WV203	17	40.64	43.18	254237WV203	37	91.44	93.98
254218WV203	18	43.18	45.72	254238WV203	38	93.98	96.52
254219WV203	19	45.72	48.26	254239WV203	39	96.52	99.06
254220WV203	20	48.26	50.80	254240WV203	40	99.06	101.60

NOTE:

1. Wafer Material: PBT 94V-0
Pin/Pos Material: brass bronze.
2. Plated: Gold flash
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1000V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

REV.				REVISION		DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	 EXCON TECHNOLOGY COMPANY	
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:				PART.NO
4/1	A	1	THIRD ANGLE PROJECTION			C2542WV				2542xxWV203