
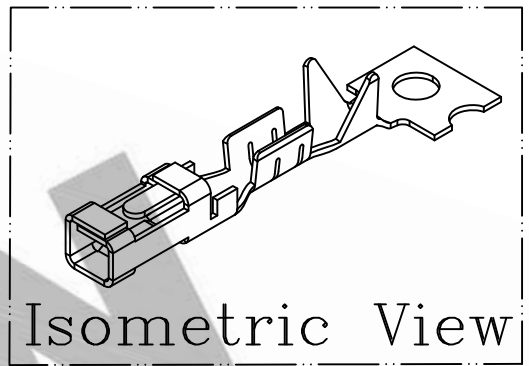



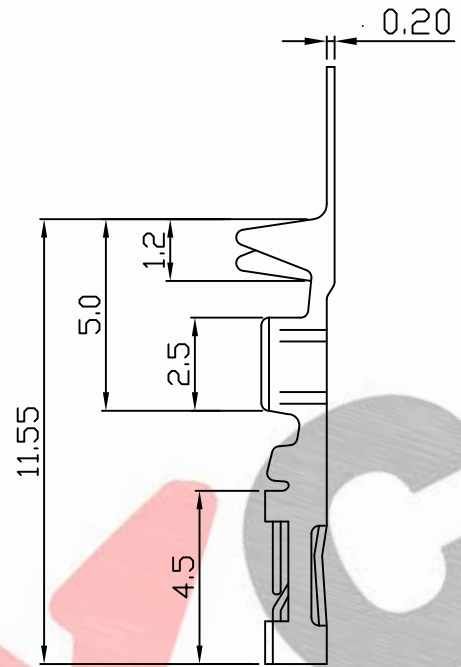


10 9 8 7 6 5 4 3 2 1

PART NO. 254300TC051
 DWG NO. C2543TC

F
 E
 D
 C
 B
 A

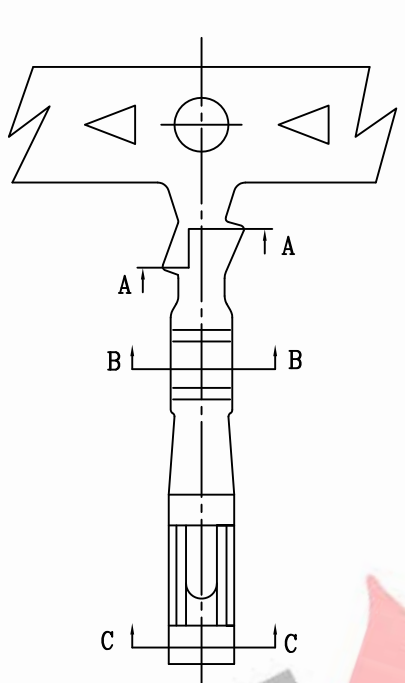

NOTE:

- 1. Terminal Material: Brass bronze
- 2. Plated: Tin pre-plated 50u"min.
- △ 3. Current rating: 3A AC/DC
- △ 4. Voltage rating: 250V AC/DC
- △ 5. Withstand voltage: 1000V AC/minute
- △ 6. Insulation resistance: 1000MΩ min
- △ 7. Applicable wires: AWG#30-#24
- △ 8. Insulation O.D.: 0.9~1.5mm
- 9. Q'ty / reel: 10,000pcs

| | | | | | |
|-------|------|-----------|-------------|------------|------|
| REV. | | REVISIONI | | DIS | DATE |
| SCALE | REV. | PAGE: | UNIT | mm | |
| 4/1 | B | 1/1 | THIRD ANGLE | PROJECTION | |

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



NOTE:
 1.修改 第7項 AWG#28-#22 → AWG#30-#24
 2.修改 第8項 1.2-1.7mm → 0.9-1.5mm
 3.新增 第3、4、5、6項及鍍厚T0.20

| | | |
|------|---------|-----------|
| REV. | DIS | DATE |
| | christy | 5/26 2015 |


DWG NO: C2543TC
 PART.NO: 254300TC051

10 9 8 7 6 5 4 3 2 1

10 9 8 7 6 5 4 3 2 1

PART NO. 254300TC201
 DWG NO. C2543TC

F
E
D
C
B
A

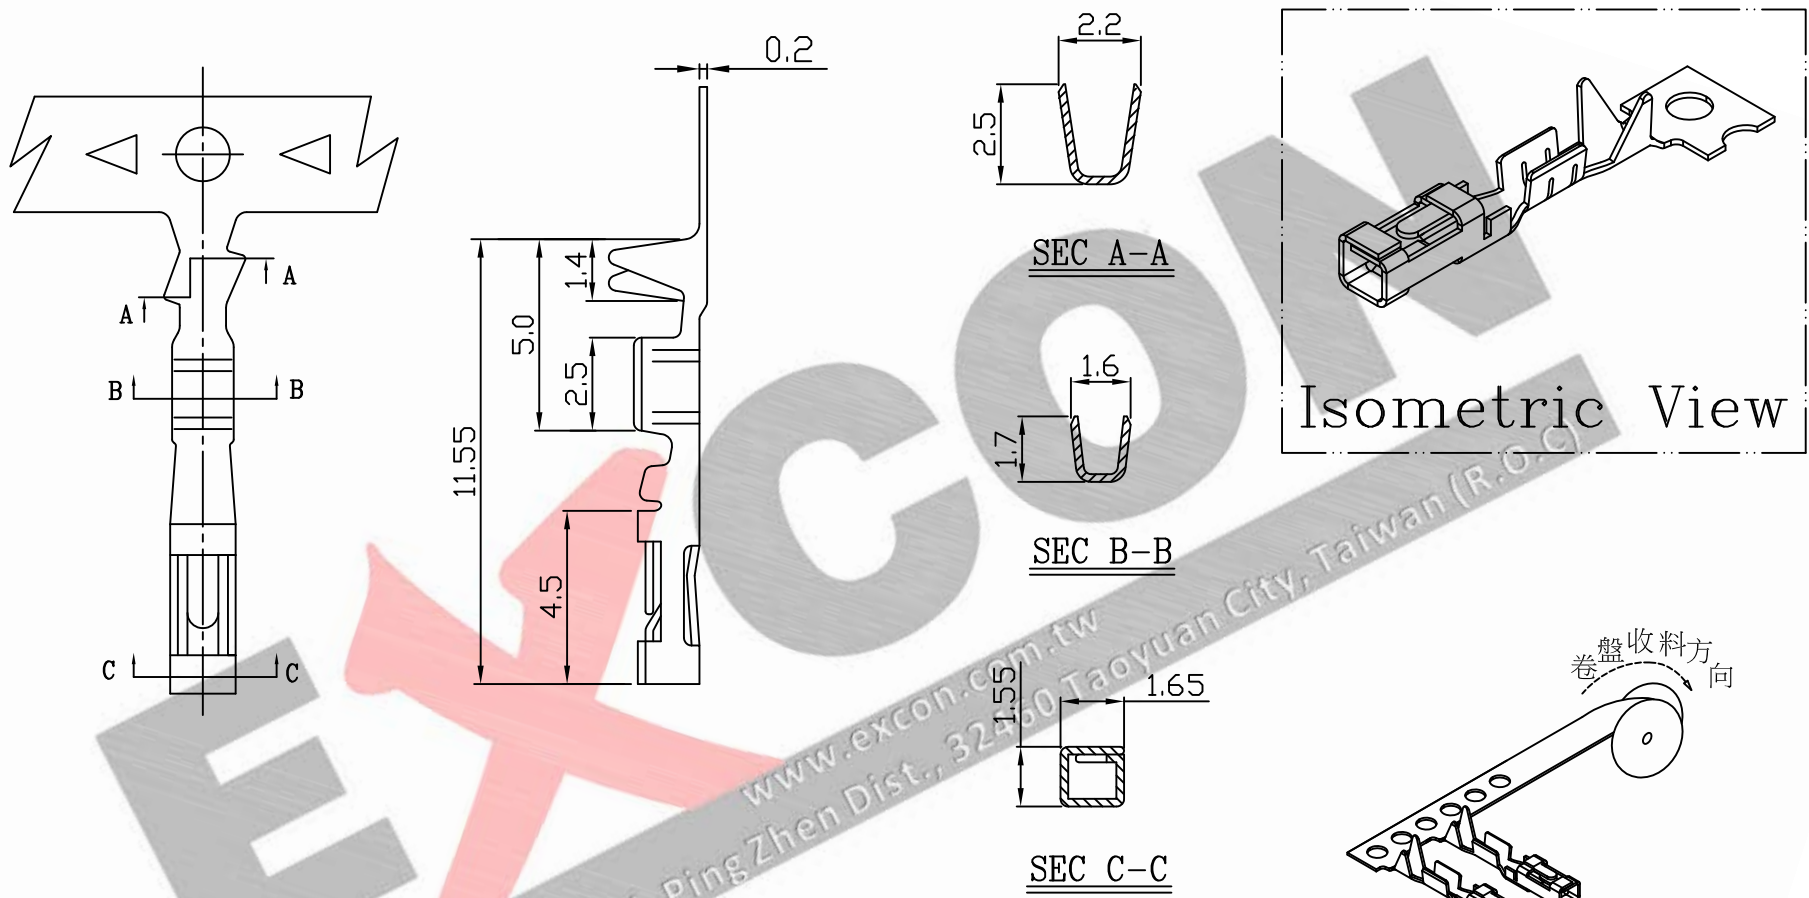

- NOTE:
1. Terminal Material: Brass bronze
 2. Plated: gold flash plated
 - △ 3. Current rating: 3A AC/DC
 - △ 4. Voltage rating: 250V AC/DC
 - △ 5. Withstand voltage: 1000V AC/minute
 - △ 6. Insulation resistance: 1000MΩ min
 - △ 7. Applicable wires: AWG#30-#24
 - △ 8. Insulation O.D.: 0.9~1.5mm
 9. Q'ty / reel: 10,000pcs

| | | | | | | |
|-------|-------------|-------|------|---|-----------|--|
| | | | | UNLESS OTHERWISE SPECIFIED TOLERANCES | | EXCON EXCON TECHNOLOGY COMPANY |
| | | | | 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM | | |
| REV. | REVISION | | | DIS | DATE | PART.NO 254300TC201 |
| B | DWG RELEASE | | | Christy | 6/28 2016 | |
| SCALE | REV. | PAGE: | UNIT | DWG NO: | | PART.NO 254300TC201 |
| 4/1 | B | 1/1 | mm | C2543TC | | |
| | | | | THIRD ANGLE PROJECTION | | |

10 9 8 7 6 5 4 3 2 1