
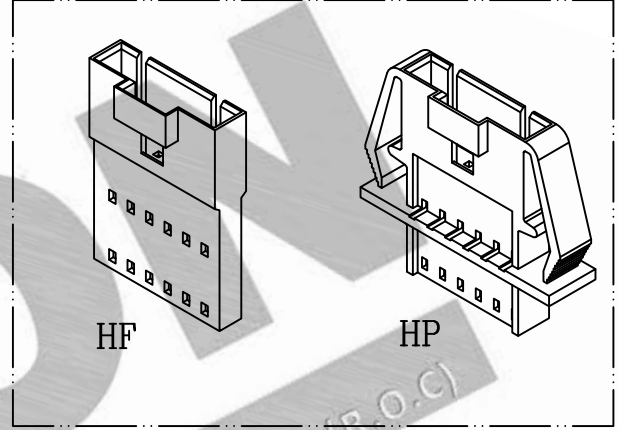
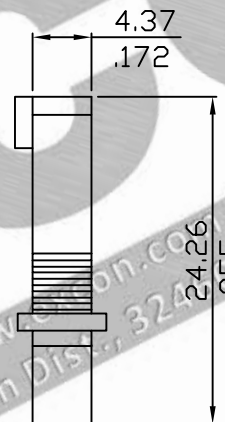
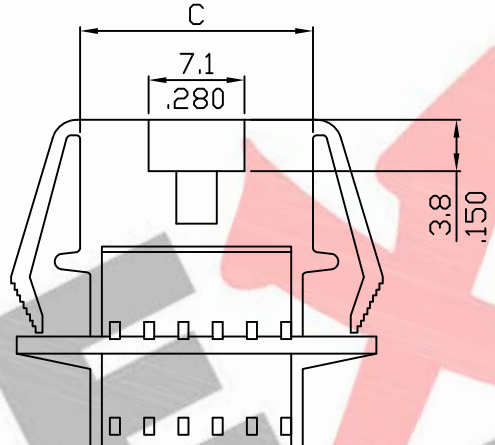


PART NO. 2545xxHP003
 DWG NO. C2545HP

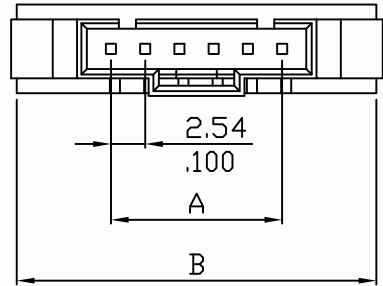

Dimensional & Ordering Information:

Part No.	Part No.	Circuits	Dim A	Dim B
254502HF003	254502HP003	2	2.54	5.08
254503HF003	254503HP003	3	5.08	7.62
254504HF003	254504HP003	4	7.62	10.16
254505HF003	254505HP003	5	10.16	12.70
254506HF003	254506HP003	6	12.70	15.24
254507HF003	254507HP003	7	15.24	17.78
254508HF003	254508HP003	8	17.78	20.32
254509HF003	254509HP003	9	20.32	22.86
254510HF003	254510HP003	10	22.86	25.40
254511HF003	254511HP003	11	25.40	27.94
254512HF003	254512HP003	12	27.94	30.48

- NOTE:
- Housing Material: Nylon UL94V-0
 - Insulation resistance: 1000M Ω min.
 - Withstand voltage: 1000V AC/minute.
 - Current rating: 3A AC/DC.
 - Voltage rating: 250V AC/DC

REV.	REVISION	DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE $\pm 0.5 \pm 0.10$ 2 PLACE $\pm 1.5 \pm 0.25$ 1 PLACE $\pm 2.0 \pm 0.50$ ANGLE DIM
SCALE	REV.	PAGE:	UNIT	
3/1	A	1	MM	DWG NO: C2545HP

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 2545xxHP003