

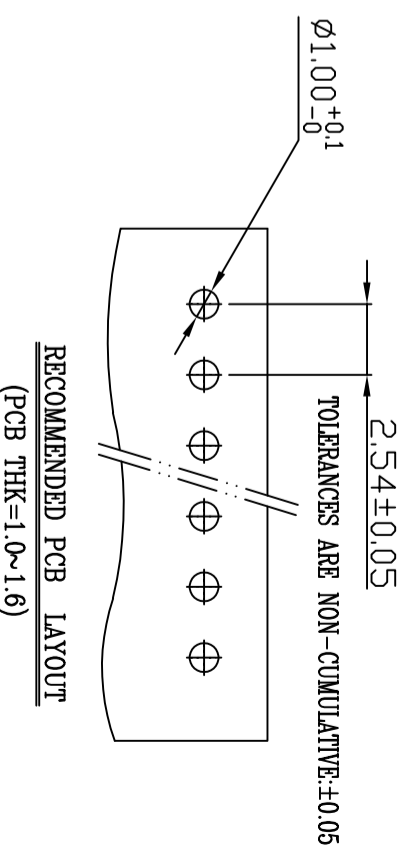
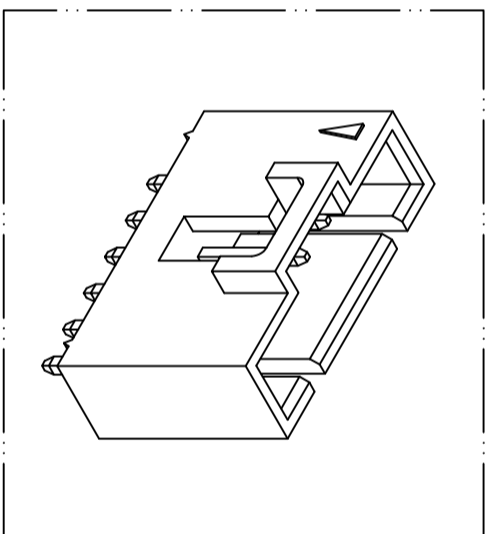
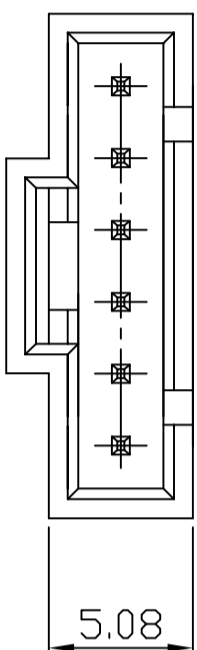


PART NO.
2545xxWV003

DWR NO.
C2545WV

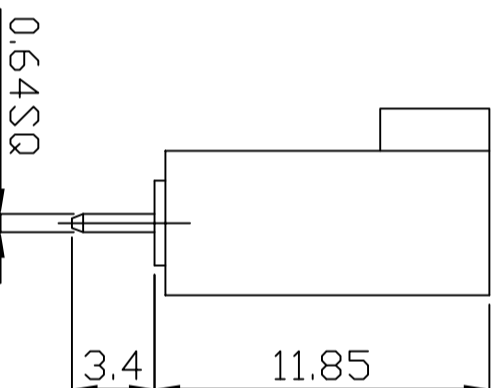

D

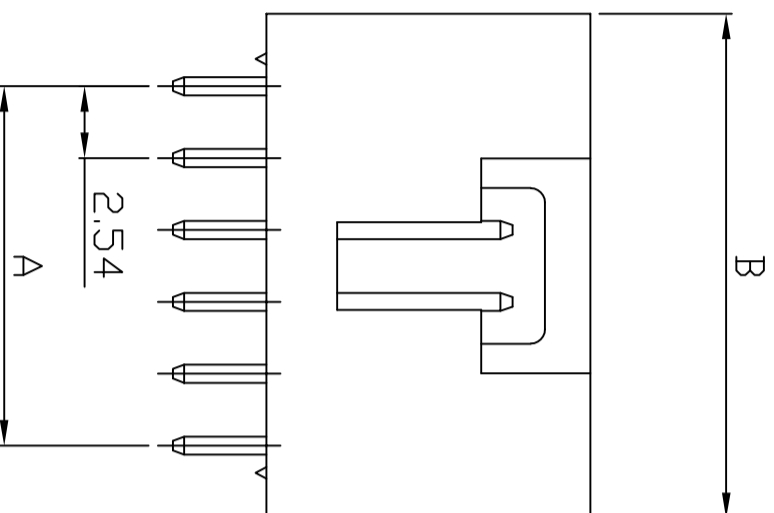

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
254502WV003	2	2.54	7.62
254503WV003	3	5.08	10.16
254504WV003	4	7.62	12.70
254505WV003	5	10.16	15.24
254506WV003	6	12.70	17.78
254507WV003	7	15.24	20.32
254508WV003	8	17.78	22.86
254509WV003	9	20.32	25.40
254510WV003	10	22.86	27.94
254511WV003	11	25.40	30.48
254512WV003	12	27.94	33.02

B

NOTE:

1. Wafer Material: Nylon-66 UL94V-0
Pin/Pos Material: brass bronze.
2. Plated: Gold flash
3. Insulation resistance: 1000M Ω min.
4. Withstand voltage: 1000V AC/minute.
5. Current rating: 3A AC/DC.
6. Voltage rating: 250V AC/DC

A

UNLESS OTHERWISE SPECIFIED TOLERANCES

3 PLACE ± 0.5 ± 0.10

2 PLACE ± 1.5 ± 0.25

1 PLACE ± 2.0 ± 0.50

EXCON

EXCON TECHNOLOGY COMPANY

REV.	REVISION	UNIT	DIS	DATE

SCALE	REV.	PAGE	UNIT	THIRD ANGLE PROJECTION
3/1	A	1	m/m	

DWG NO.: C2545WV

PART NO

2545xxWV003

10

9

8

7

6

5

4

3

2

1