

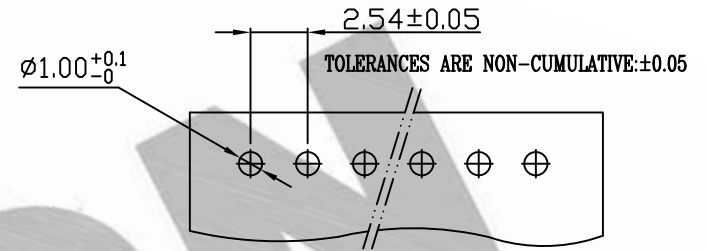
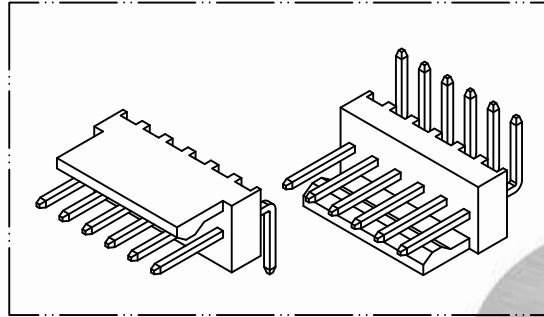
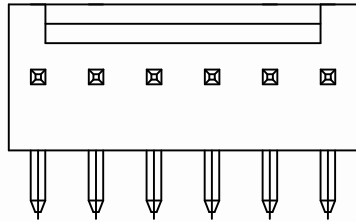


PART NO. 2546xxWR001
 DWG NO. C2546WR

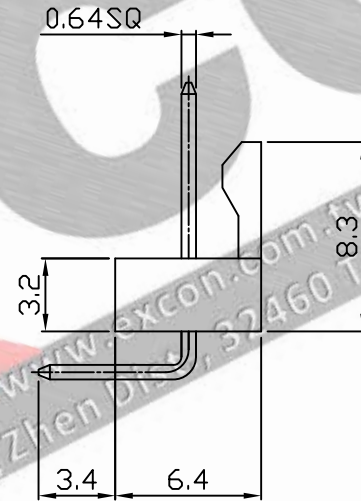

RECOMMENDED PCB LAYOUT
 (PCB THK=1.0~1.6)

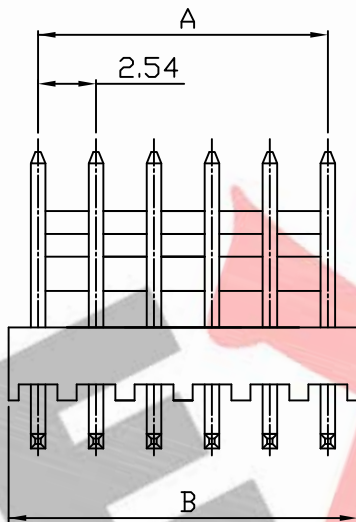

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
254602WR001	2	2.54	5.08
254603WR001	3	5.08	7.62
254604WR001	4	7.62	10.16
254605WR001	5	10.16	12.70
254606WR001	6	12.70	15.24
254607WR001	7	15.24	17.78
254608WR001	8	17.78	20.32
254609WR001	9	20.32	22.86
254610WR001	10	22.86	25.40
254611WR001	11	25.40	27.94
254612WR001	12	27.94	30.48
254613WR001	13	30.48	33.02
254614WR001	14	33.02	35.56
254615WR001	15	35.56	38.10
254616WR001	16	38.10	40.64
254617WR001	17	40.64	43.18
254618WR001	18	43.18	45.72
254619WR001	19	45.72	48.26
254620WR001	20	48.26	50.80

NOTE:

1. Wafer Material: Nylon 66 UL
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1000V AC/minute.
5. Current retang: 3A AC/DC.
6. Voltage rating: 250V AC/DC

REV.	REVISION	DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM
SCALE	REV.	PAGE:	UNIT	
4/1	A	1	mm	DWG NO: C2546WR

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 2546xxWR001