
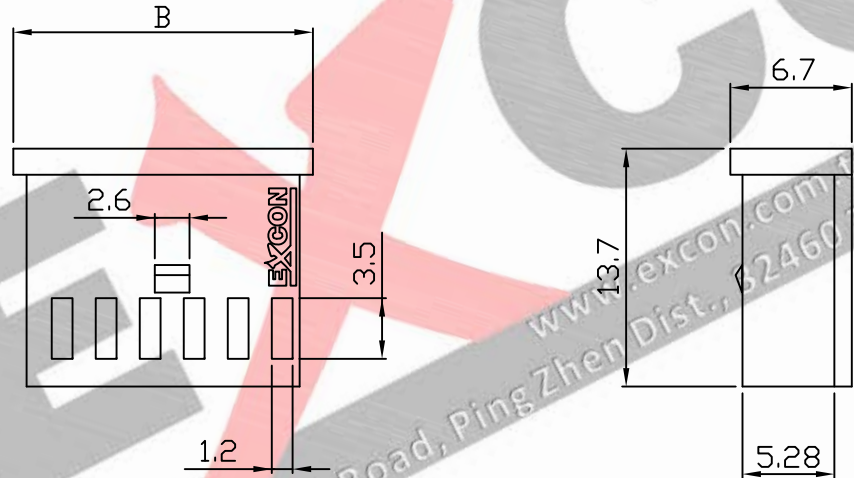
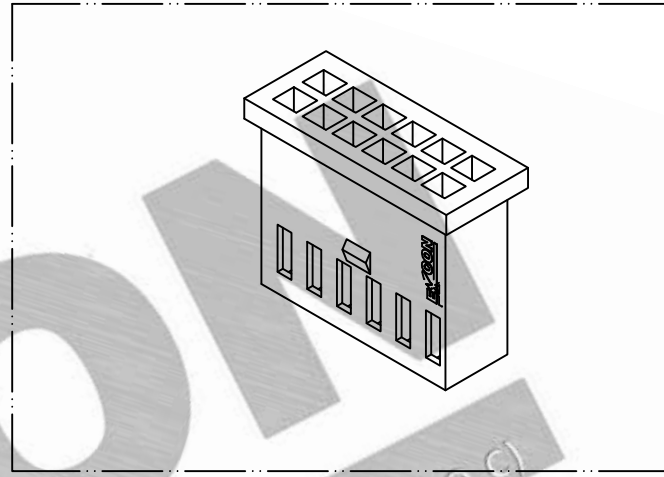


PART NO. 2548xxHA203
 DWG NO. C2548HA

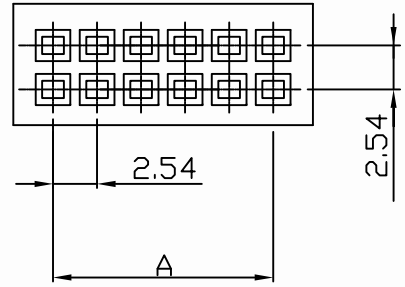

Dimensional & Ordering

Part No.	POS	DIM A	DIM B
254804HA203	4	2.54	7.12
254808HA203	8	7.62	12.20
254810HA203	10	10.16	14.74
254812HA203	12	12.70	17.28
254816HA203	16	17.78	22.36
254818HA203	18	20.32	24.90
254820HA203	20	22.86	27.44
254824HA203	24	27.94	32.52
254830HA203	30	35.56	40.14
254844HA203	44	53.34	57.92

NOTE:

1. Housing Material: PBT UL94-V0
2. Insulation resistance: 1000MΩ min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 3A AC/DC.
5. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY	
				3 PLACE ±0.5 ±0.10			
				2 PLACE ±1.5 ±0.25			
				1 PLACE ±2.0 ±0.50			
				ANGLE DIM			
B	Add. circuits			Tina	150301		
REV.	REVISIONI			DIS	DATE		
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:	
3/1	B	1	THIRD ANGLE PROJECTION			C2548HA	
						PART.NO	
						2548xxHA203	