
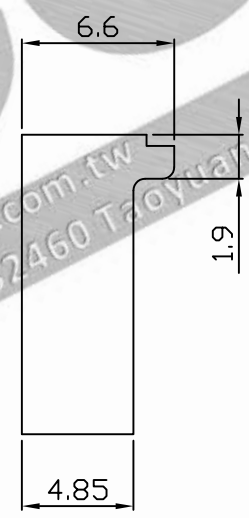
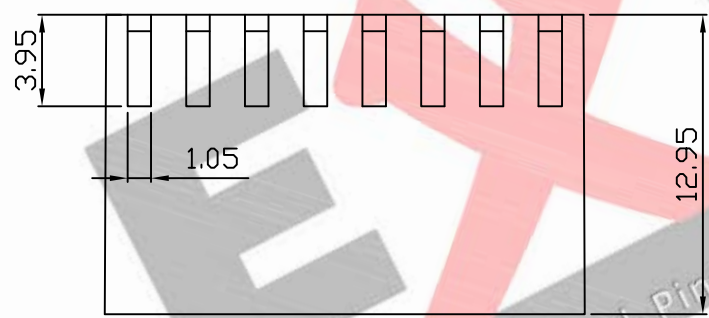
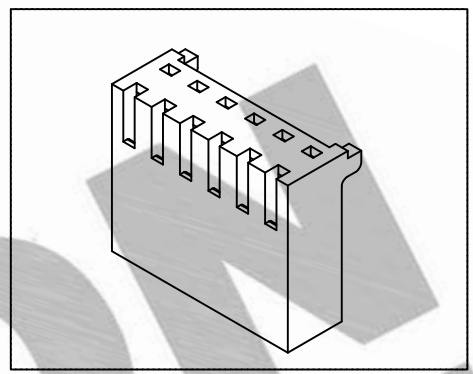


PART NO. 2549xxHA001
 DWG NO. C2549HA

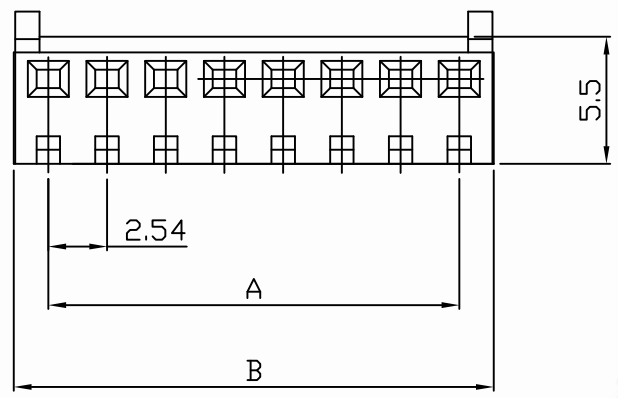

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
254902HA001	2	2.54	5.59
254903HA001	3	5.08	8.13
254904HA001	4	7.62	10.67
254905HA001	5	10.16	13.21
254906HA001	6	12.70	15.75
254907HA001	7	15.24	18.29
254908HA001	8	17.78	20.83
254909HA001	9	20.32	23.37
254910HA001	10	22.86	25.91
254911HA001	11	25.40	28.45
254912HA001	12	27.94	30.99
254913HA001	13	30.48	33.53
254914HA001	14	33.02	36.07
254915HA001	15	35.56	38.61
254916HA001	16	38.10	41.15
254917HA001	17	40.64	43.69
254918HA001	18	43.18	46.23
254919HA001	19	45.72	48.77
254920HA001	20	48.26	51.31

NOTE:

1. Housing Material: Nylon 66 UL94V0
2. Color: Natural
2. Insulation resistance: 1000M Ω min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 3A AC/DC.
5. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ± 0.5 ± 0.10			
2 PLACE ± 1.5 ± 0.35			
1 PLACE ± 2.0 ± 0.50			
ANGLE DIM			
REV.	REVISION		DIS DATE
SCALE	REV.	PAGE:	UNIT mm
4/1	A	1	THIRD ANGLE PROJECTION

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 2549xxHA001