
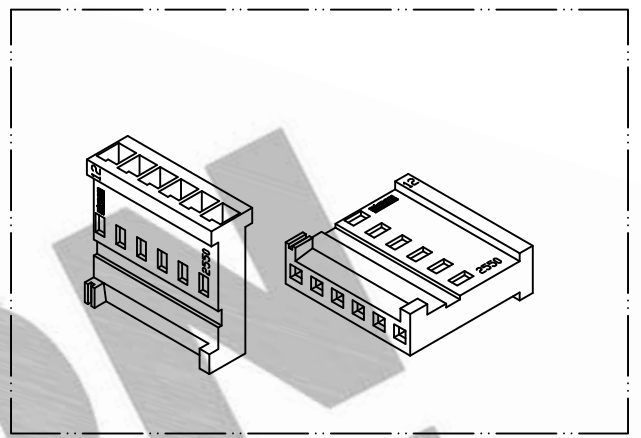
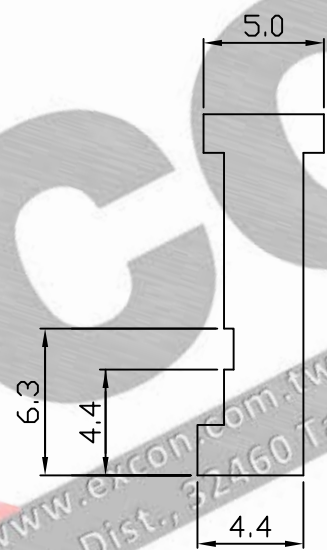
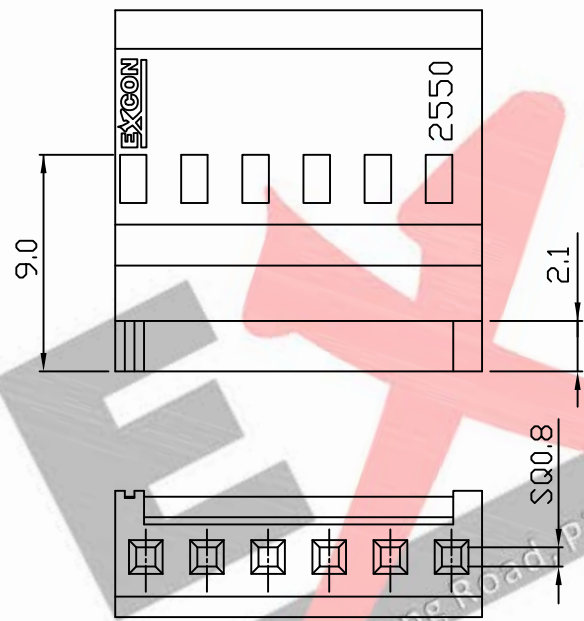


PART NO. 2550xxHA203
 DWG NO. C2550HA

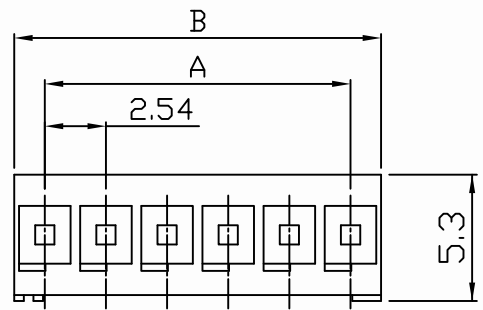

Ordering Information and Dimensions:

Part No.	Circuits	Dim A	Dim B
255002HA203	2	2.54	5.08
255003HA203	3	5.08	7.62
255004HA203	4	7.62	10.16
255005HA203	5	10.16	12.70
255006HA203	6	12.70	15.24
255007HA203	7	15.24	17.78
255008HA203	8	17.78	20.32
255009HA203	9	20.32	22.86
255010HA203	10	22.86	25.40
255011HA203	11	25.40	27.94
255012HA203	12	27.94	30.48
255013HA203	13	30.48	33.02
255014HA203	14	33.02	35.56
255015HA203	15	35.56	38.10
255016HA203	16	38.10	40.64

NOTE:

1. Housing Material:PBT UL94V-0
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 3A AC/DC.
5. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.35		
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		
REV.	REVISION			DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:
4/1	B	1	THIRD ANGLE PROJECTION			C2550HA
					PART.NO	
					2550xxHA203	