

10

9

8

7

6

5





4

3

2

1

PART NO.
2551xxHA203
DWG NO.
C2551HA

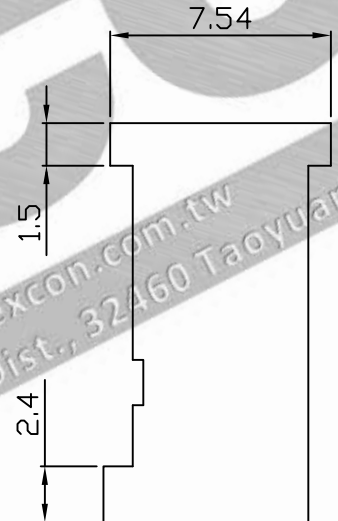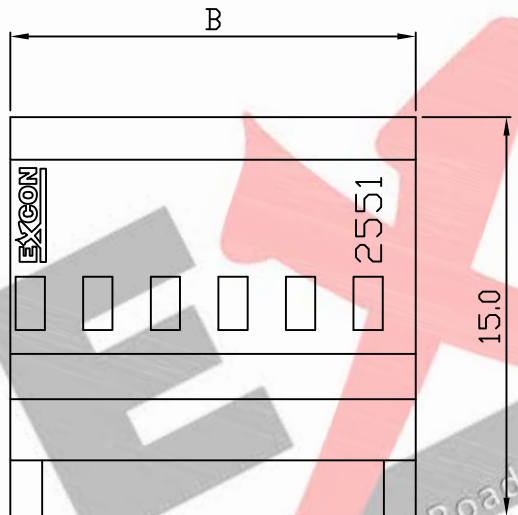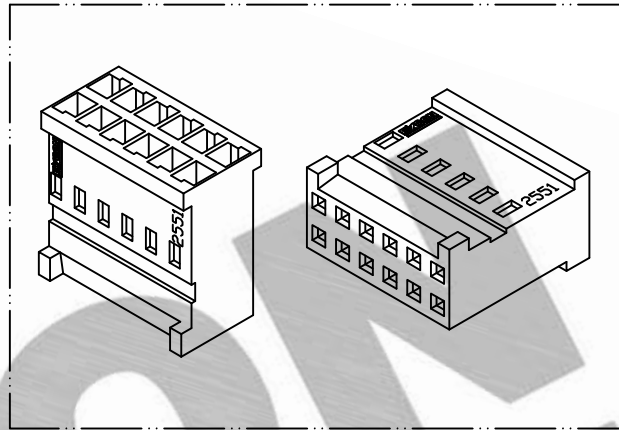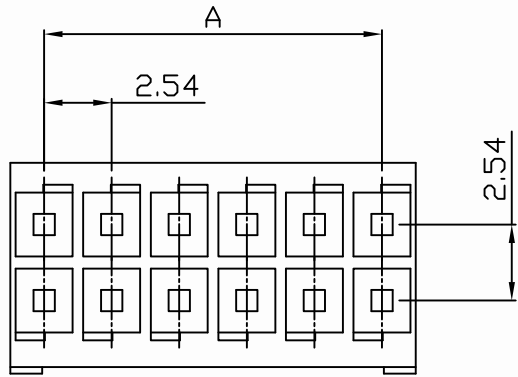

Ordering Information and Dimensions:

Part No.	Circuits	Dim A	Dim B
255106HA203	6	5.08	7.62
255108HA203	8	7.62	10.16
255110HA203	10	10.16	12.70
255112HA203	12	12.70	15.24
255114HA203	14	15.24	17.78
255116HA203	16	17.78	20.32
255118HA203	18	20.32	22.86
255120HA203	20	22.86	25.40
255122HA203	22	25.40	27.94
255124HA203	24	27.94	30.48
255126HA203	26	30.48	33.02
255128HA203	28	33.02	35.56
255130HA203	30	35.56	38.10
255132HA203	32	38.10	40.64
255134HA203	34	40.64	43.18
255116HA203	36	43.18	45.72

NOTE:

1. Housing Material:PBT UL94V-0
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1000V AC/minute.
4. Current rating: 3A AC/DC.
5. Voltage rating: 250V AC/DC

REV.	REVISIONI			DIS	DATE
SCALE	REV.	PAGE:	UNIT	mm	
4/1	A	1	THIRD ANGLE PROJECTION		

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.35
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

EXCON

EXCON TECHNOLOGY COMPANY

PART.NO
2551xxHA203

10

9

8

7

6

5

4

3

2

1