

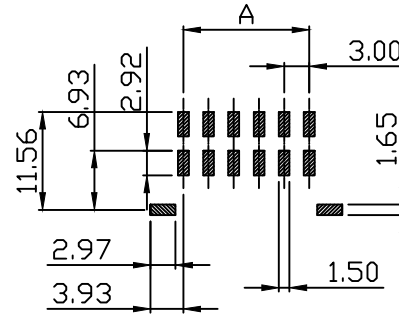
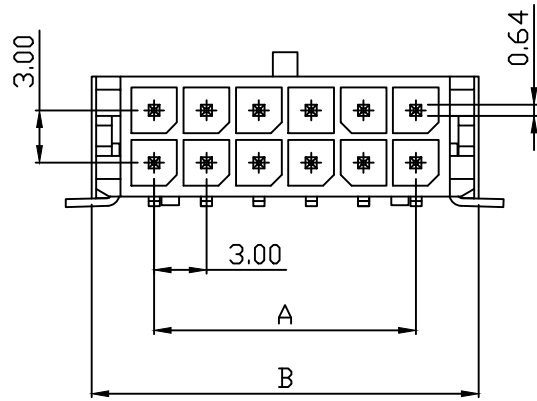
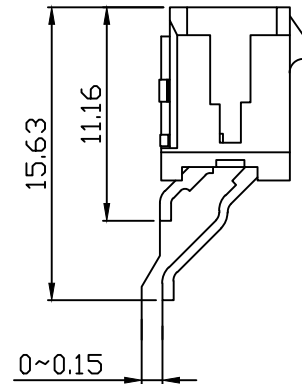


PART NO. 3001xxWE003
 DWG NO. C3001WE

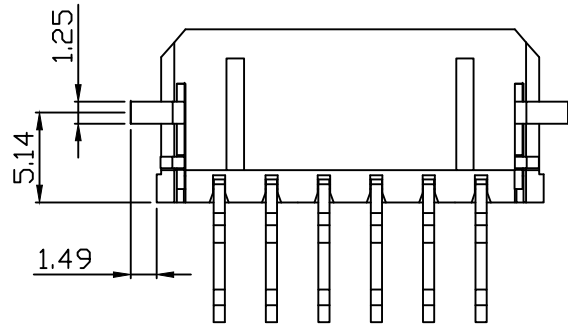

RECOMMENDED PCB LAYOUT
 (PCB T=1.0~1.6mm)

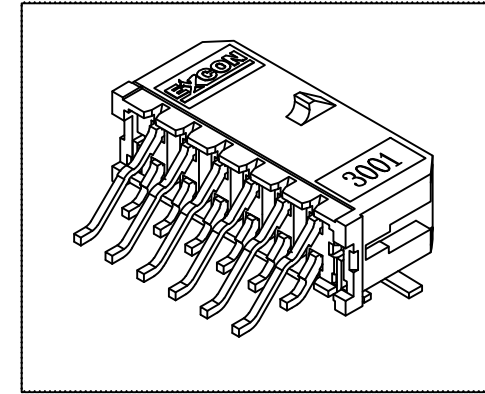

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
300102WE103	2	--	6.65
300104WE103	4	3.0	9.65
300106WE103	6	6.0	12.65
300108WE103	8	9.0	15.65
300110WE103	10	12.0	18.65
300112WE103	12	15.0	21.65
300114WE103	14	18.0	24.65
300116WE103	16	21.0	27.65
300118WE103	18	24.0	30.65
300120WE103	20	27.0	33.65
300122WE103	22	30.0	36.65
300124WE103	24	33.0	39.65

NOTE:

1. Wafer Material: Polyester LCP UL94-V0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 5A AC/DC.
6. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

EXCON
 EXCON TECHNOLOGY COMPANY

REV.	REVISION		DIS	DATE
SCALE	REV.	PAGE:	UNIT	m m
NONE	B	1	THIRD ANGLE PROJECTION	

DWG NO: C3001WE

PART.NO: 3001xxWE003