
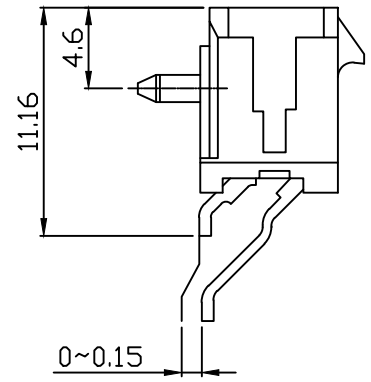
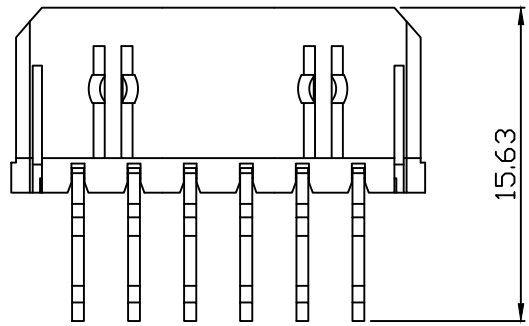
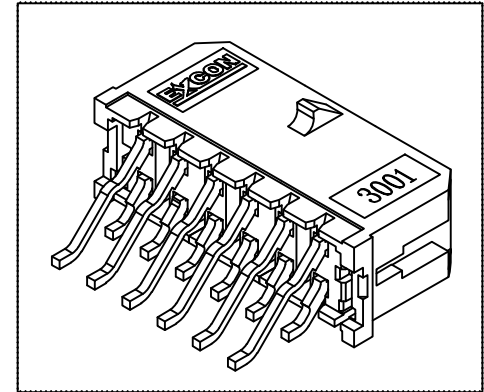
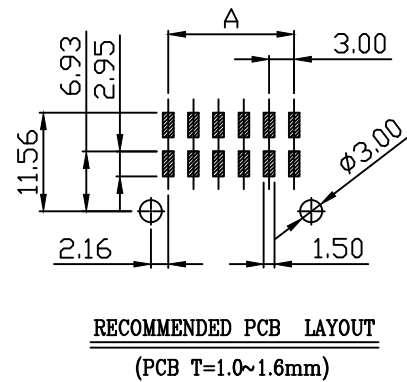


PART NO. 3001xxWH003
 DWG NO. C3001WH

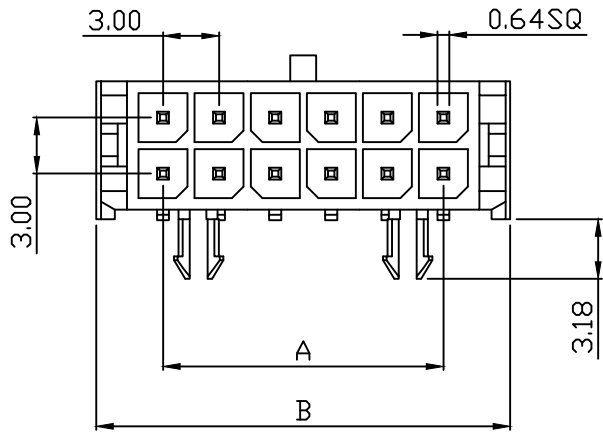

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
300102WH103	2	--	6.65
300104WH103	4	3.0	9.65
300106WH103	6	6.0	12.65
300108WH103	8	9.0	15.65
300110WH103	10	12.0	18.65
300112WH103	12	15.0	21.65
300114WH103	14	18.0	24.65
300116WH103	16	21.0	27.65
300118WH103	18	24.0	30.65
300120WH103	20	27.0	33.65
300122WH103	22	30.0	36.65
300124WH103	24	33.0	39.65

NOTE:

1. Wafer Material: Polyester LCP UL94-V0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 5A AC/DC.
6. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		PART.NO
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		3001xxWH003
REV.	REVISION		DIS	DATE	DWG NO:	
SCALE	REV.	PAGE:	UNIT	m m		
NONE	B	1	THIRD ANGLE PROJECTION		C3001WH	