

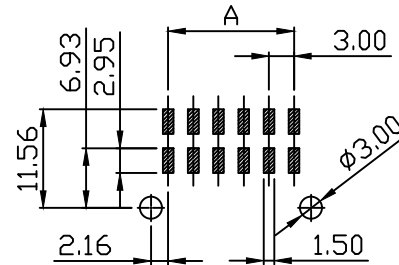
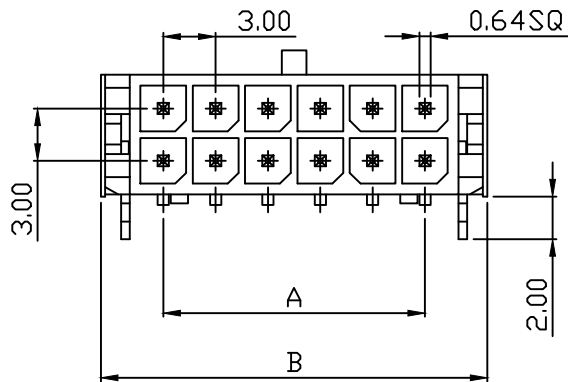
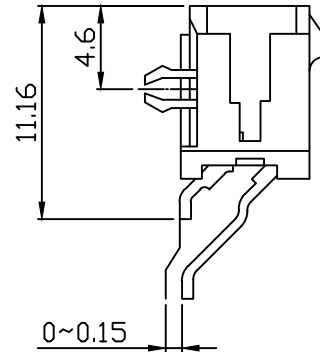


PART NO. 3001xxWJ003
 DWG NO. C3001WJ

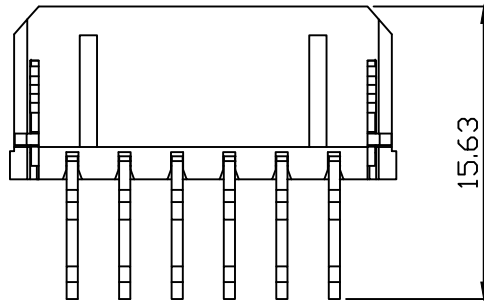

RECOMMENDED PCB LAYOUT
 (PCB T=1.0~1.6mm)

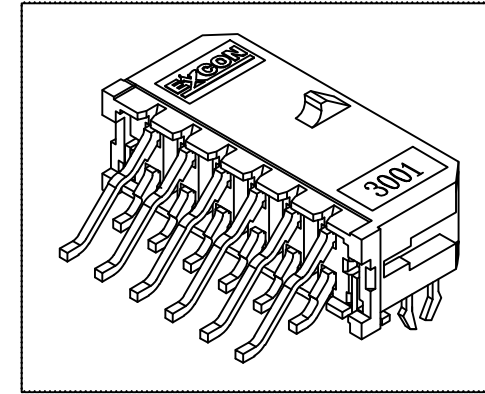

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
300102WJ03	2	--	6.65
300104WJ03	4	3.0	9.65
300106WJ03	6	6.0	12.65
300108WJ03	8	9.0	15.65
300110WJ03	10	12.0	18.65
300112WJ03	12	15.0	21.65
300114WJ03	14	18.0	24.65
300116WJ03	16	21.0	27.65
300118WJ03	18	24.0	30.65
300120WJ03	20	27.0	33.65
300122WJ03	22	30.0	36.65
300124WJ03	24	33.0	39.65

NOTE:

1. Wafer Material: Polyester LCP UL94-V0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000MΩ min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 5A AC/DC.
6. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

EXCON
 EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE
SCALE	REV.	PAGE:	UNIT
NONE	B	1	mm

DWG NO:

C3001WJ

PART.NO

3001xxWJ003