


PART NO. 300200TA351
 DWG NO. C3002TA

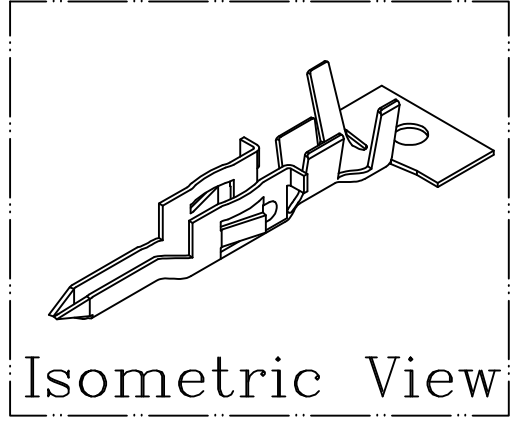

- NOTE:
1. Terminal Material: phosphor
 2. Plated: Tin pre-plated 50u"min.
 3. Current rating: 5A AC/DC
 4. Voltage rating: 250V AC/DC
 5. Withstand voltage: 1500V AC/minute
 6. Insulation resistance: 1000MΩ min
 7. Applicable wires: AWG#24-#20
 8. Insulation O.D.: 1.2~1.7mm
 9. Q'ty / reel: 15,000pcs

				UNLESS OTHERWISE SPECIFIED TOLERANCES		EXCON EXCON TECHNOLOGY COMPANY	
C	pitch measure showed.			Christy	1/30 2016		3 PLACE ±0.5 ±0.10
B	DWG RELEASE			Christy	8/12 2015		2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50
REV.	REVISIONI			DIS	DATE	ANGLE DIM	
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:	
4/1	C	1/1	THIRD ANGLE PROJECTION		C3002TA	PART.NO	
						300200TA351	