

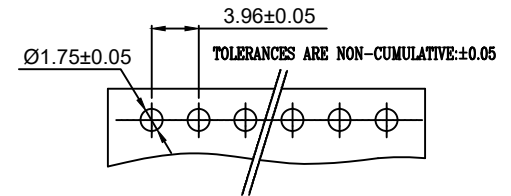
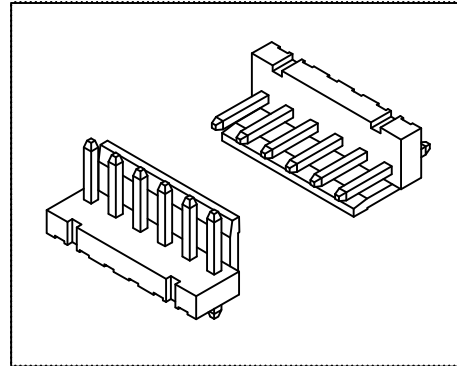
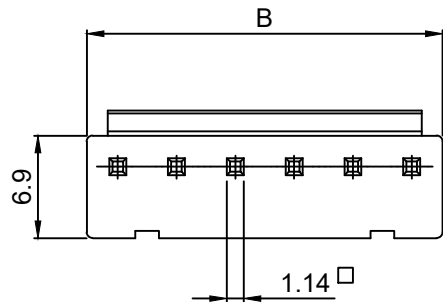


PART NO. 3962xxWV001
 DWG NO. C3962WV



RECOMMENDED PCB LAYOUT
 (PCB THK=1.0~1.6)

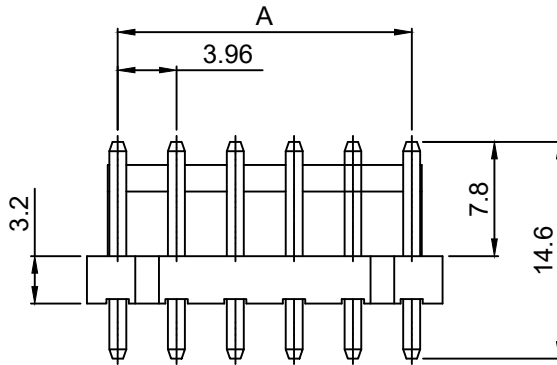

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
396202WV001	2	3.96	7.92
396203WV001	3	7.92	11.88
396204WV001	4	11.88	15.84
396205WV001	5	15.84	19.80
396206WV001	6	19.80	23.76
396207WV001	7	23.76	27.72
396208WV001	8	27.72	31.68
396209WV001	9	31.68	35.64
396210WV001	10	35.64	39.60
396211WV001	11	39.60	43.56
396212WV001	12	43.56	47.52
396213WV001	13	47.52	51.48

NOTE:

1. Wafer Material: Nylon 66 UL94V-0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 1500V AC/minute.
5. Current retang: 5A AC/DC.
6. Voltage rating: 250V AC/DC

REV.	REVISIONI	DIS	DATE
SCALE	REV.	PAGE:	UNIT
2/1	A	1	mm

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



DWG NO:	C3962WV	PART.NO	3962xxWV001
---------	---------	---------	-------------