

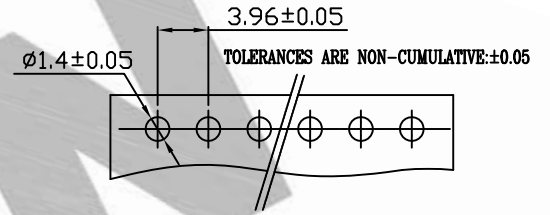





PART NO. 3971xxWV558
 DWG NO. C3971WV

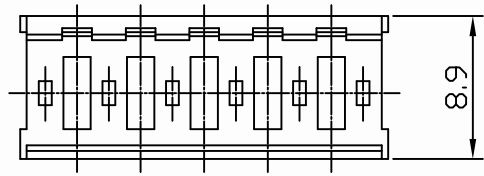

RECOMMENDED PCB LAYOUT
 (PCB THK=1.0~1.6)

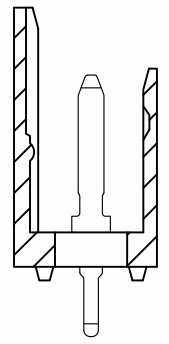

SEC. A-A

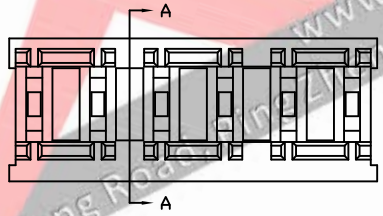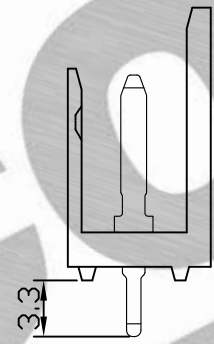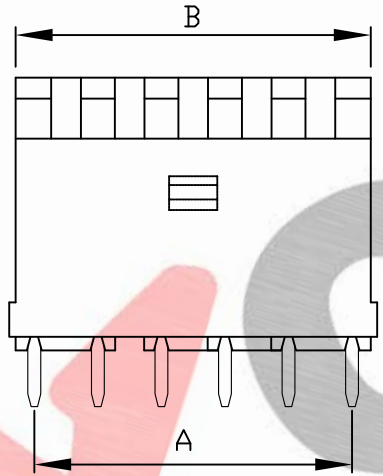

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
397102WV558	2	3.96	6.28
397104WV558	4	11.88	14.20
397106WV558	6	19.80	22.12
397108WV558	8	27.72	30.04
397110WV558	10	35.64	37.96
397112WV558	12	43.56	45.88

- NOTE:**
1. Wafer Material: PC UL94V-0.
Pin/Pos Material: Brass.
 2. Plated: Tin-plated 50u"min.
 3. Insulation resistance: 1000M ohm/min.
 4. Withstand voltage: 1500V AC/minute.
 5. Current rating: 5A AC/DC.
 6. Voltage rating: 250V AC/DC.

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ±0.5 ±0.10			
2 PLACE ±1.5 ±0.25			
1 PLACE ±2.0 ±0.50			
ANGLE DIM			
REV.	REVISION		DIS DATE
SCALE	REV.	PAGE:	UNIT M M
2/1	A	1	THIRD ANGLE PROJECTION

EXCON
EXCON TECHNOLOGY COMPANY

PART.NO: 3971xxWV558

