
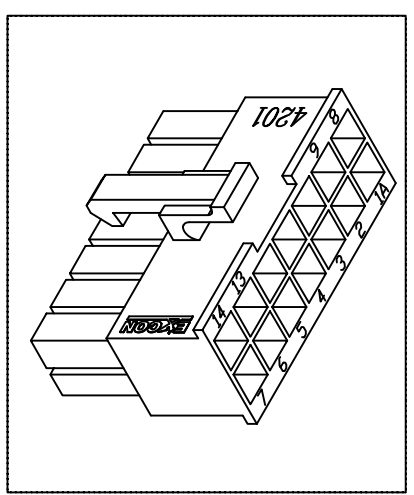
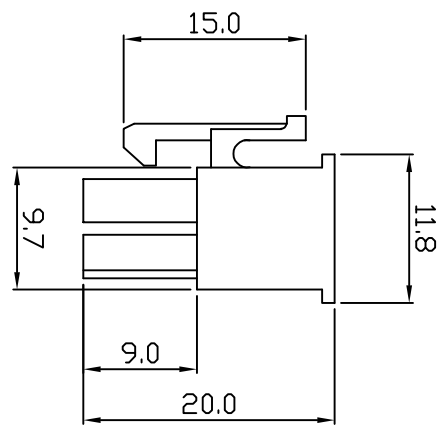
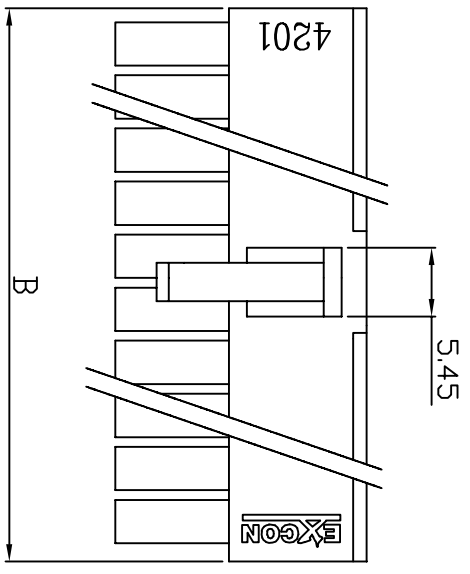


PART NO.
4201xxHMxxx
DWG NO.
C4201HM

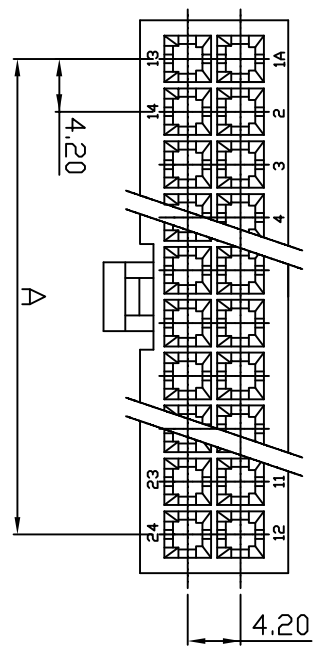

NOTE:

1. Wafer Material: Nylon 66 UL94V2 or V0
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC
- Δ 6. If the part numbers are "4201xxHM001G" that is for IEC60335-1 4th EDITION.

Dimensional & Ordering Information:

Part No.	Part No.	Part No.	Circuits	A	B
NY96 UL94V0	NY96 UL94V2	NY96 UL94V2	2	4.2	5.5
420102HM001G	420102HM051G	420102HM051	4	4.2	9.7
420104HM001G	420104HM051G	420104HM051	4	8.4	13.9
420106HM001G	420106HM051G	420106HM051	8	12.6	16.1
420108HM001G	420108HM051G	420108HM051	10	16.8	22.3
420110HM001G	420110HM051G	420110HM051	12	21.0	26.5
420112HM001G	420112HM051G	420112HM051	14	25.2	30.7
420114HM001G	420114HM051G	420114HM051	16	29.4	34.9
420116HM001G	420116HM051G	420116HM051	18	33.6	39.1
420118HM001G	420118HM051G	420118HM051	20	37.8	43.3
420120HM001G	420120HM051G	420120HM051	22	42.0	47.5
420122HM001G	420122HM051G	420122HM051	24	46.2	51.7

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE

SCALE	REV.	PAGE:	UNIT	DIS	DATE
2/1	B	1	THIRD ANGLE PROJECTION	mm	

DWG NO:	PART NO
C4201HM	4201xxHMxxx