
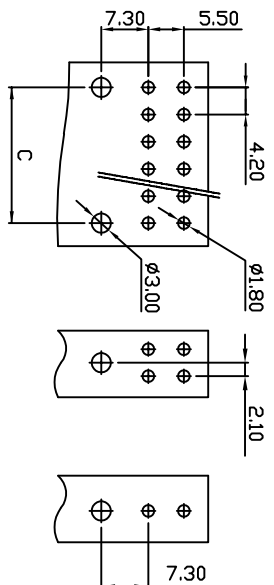



PART NO.
4201xxWFOxx
DWG NO.
C4201WF

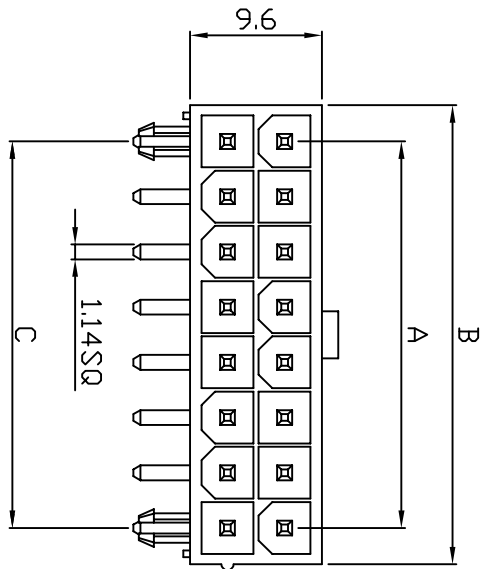


6-24 Circuits 4 Circuits 2 Circuits

RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

Dimensional & Ordering Information:

Part No.	NY66 UI.94V2	Circuits	A	B	C
NY66 UI.94V0	NY66 UI.94V2	2	5.4	5.4	5.4
420102WF001	420102WF051	2	4.2	9.6	9.6
420104WF001	420104WF051	4	8.4	13.8	8.4
420106WF001	420106WF051	6	12.6	18.0	12.6
420108WF001	420108WF051	8	16.8	22.2	16.8
420110WF001	420110WF051	10	21.0	26.4	21.0
420112WF001	420112WF051	12	25.2	30.6	25.2
420114WF001	420114WF051	14	29.4	34.8	29.4
420116WF001	420116WF051	16	33.6	39.0	33.6
420118WF001	420118WF051	18	37.8	43.2	37.8
420120WF001	420120WF051	20	42.0	47.4	42.0
420122WF001	420122WF051	22	46.2	51.6	46.2
420124WF001	420124WF051	24	46.2	51.6	46.2

- NOTE:**
1. Wafer Material: Nylon 66 UL94V2 or V0
 2. Pin/Pos Material: brass bronze.
 3. Plated: Tin-plated 50u"min.
 4. Insulation resistance: 1000M ohm/min.
 5. Withstand voltage: 1500V AC/minute.
 6. Current rating: 5A AC/DC.
 7. Voltage rating: 600V AC/DC

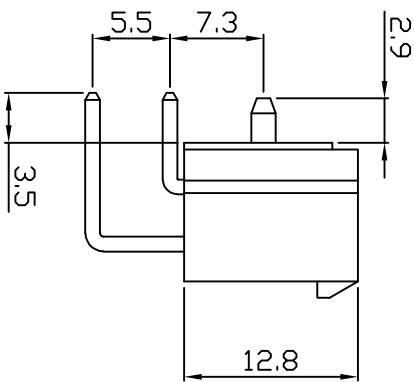

UNLESS OTHERWISE SPECIFIED TOLERANCES
3 PLACE ±0.5 ±0.10
2 PLACE ±1.5 ±0.25
1 PLACE ±2.0 ±0.50
ANGLE DIM

EXCON TECHNOLOGY COMPANY

REV.	REVISION	UNIT	DIS	DATE
2/1	A	1	THIRD ANGLE PROJECTION	

SCALE	REV.	PAGE:	UNIT	DWG NO:	PART NO
2/1	A	1	m/m	C4201WF	4201xxWFOxx

