

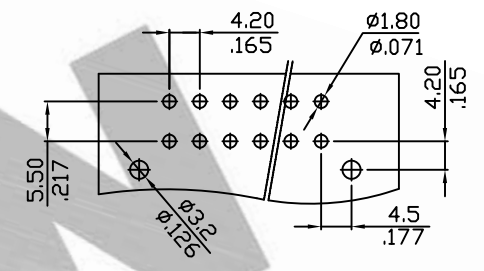
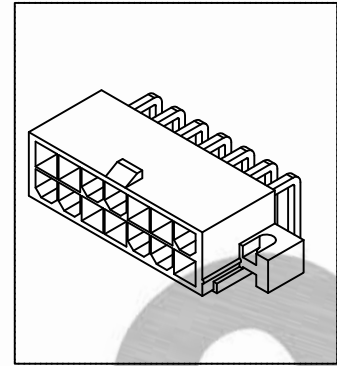


PART NO. 4201xxWHxxx
 DWG NO. C4201WH

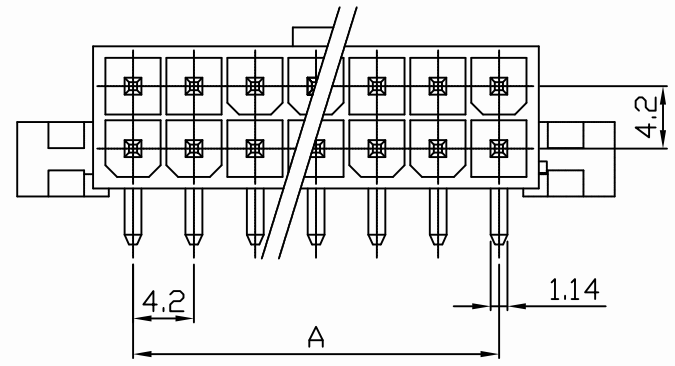

RECOMMENDED PCB LAYOUT
 (PCB T=1.0~1.6mm)
 (PCB T=.039~.063in)

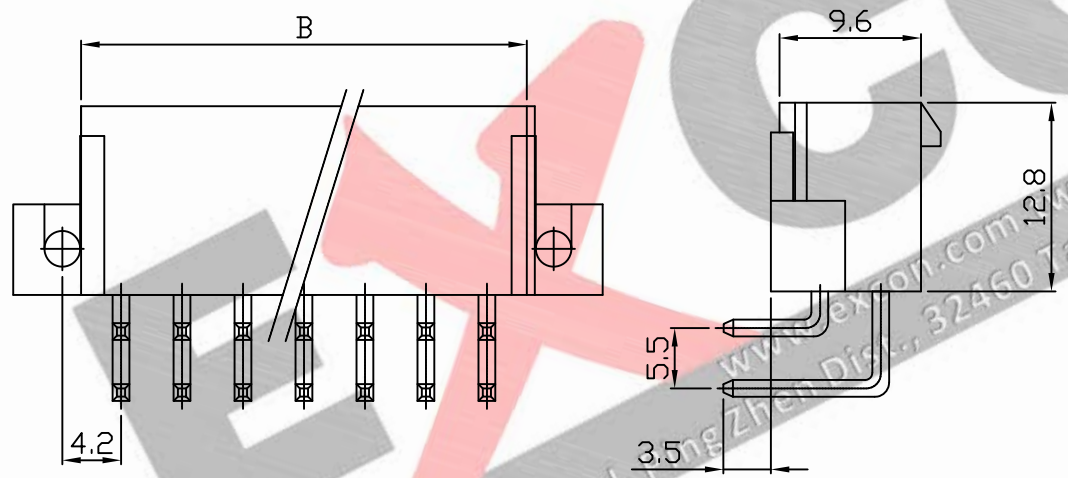

Dimensional & Ordering Information:

Part No.		Circuits	A	B
NY66 UL94V0	NY66 UL94V2			
420102WH001	420102WH051	2	4.2	5.4
420104WH001	420104WH051	4	8.4	9.6
420106WH001	420106WH051	6	12.6	13.8
420108WH001	420108WH051	8	16.8	18.0
420110WH001	420110WH051	10	21.0	22.2
420112WH001	420112WH051	12	25.2	26.4
420114WH001	420114WH051	14	29.4	30.6
420106WH001	420106WH051	16	33.6	34.8
420118WH001	420118WH051	18	37.8	39.0
420120WH001	420120WH051	20	42.0	43.2
420122WH001	420122WH051	22	46.2	47.4
420124WH001	420124WH051	24	46.2	51.6

NOTE:

1. Wafer Material: Nylon 66 UL94V2 or V0
Pin/Pos Material: brass bronze.
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

REV.	REVISION		DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM
SCALE	REV.	PAGE:	UNIT	M M	
2/1	A	1	THIRD ANGLE PROJECTION	⊕	DWG NO: C4201WH

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 4201xxWHxxx