

10

9

8

7

6

5

4








3

2

1

PART NO.  
420200TXxxx

DWG NO.  
C4202TX

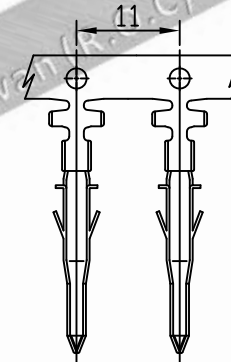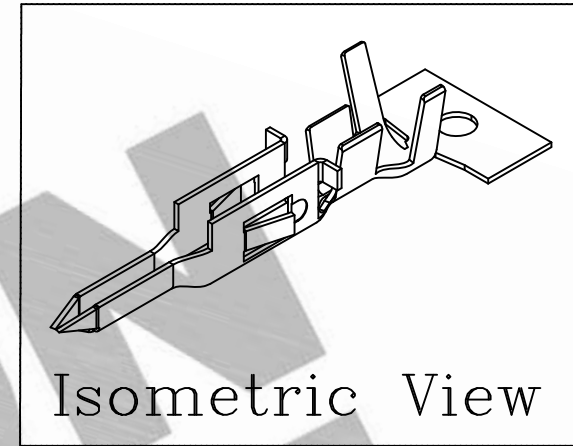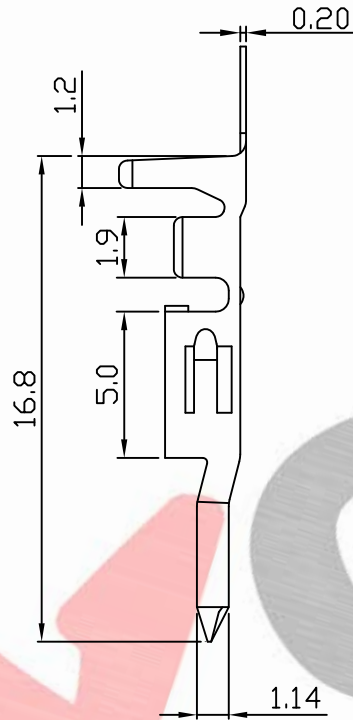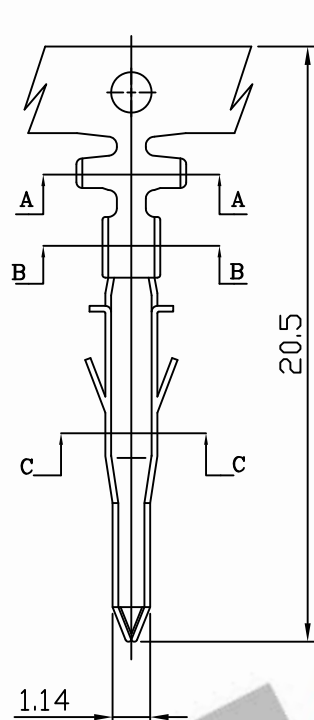

NOTE:

1. Terminal Material: Brass bronze or Phosphor bronze
2. Plated: Tin pre-plated 50u"min.
3. Current rating: 5A AC/DC
4. Voltage rating: 600V AC/DC
5. Withstand voltage: 1500V AC/minute
6. Insulation resistance: 1000MΩ min
7. Insulation O.D.: 1.7~2.8mm
8. Q'ty / reel: 4,000pcs

No.	Part No.	Wire Range	Material	Finishing
1	420200TX051	AWG#16~#20	Brass	Tin pre-plated
2	420200TX351	AWG#16~#20	Phosphor	Tin pre-plated

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 3 PLACE ±0.5 ±0.10  
 2 PLACE ±1.5 ±0.25  
 1 PLACE ±2.0 ±0.50  
 ANGLE DIM



REV.	REVISIONI			CHRISTY	1/7
SCALE	REV.	PAGE:	UNIT	MM	DWG NO:
4/1	C	1/1	THIRD ANGLE	PROJECTION	C4202TX

PART.NO			420200TXxxx		
---------	--	--	-------------	--	--

10

9

8

7

6

5

4

3

2

1