
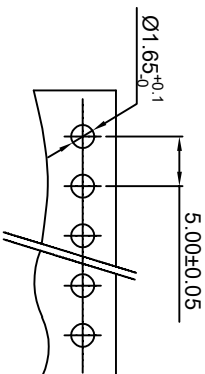
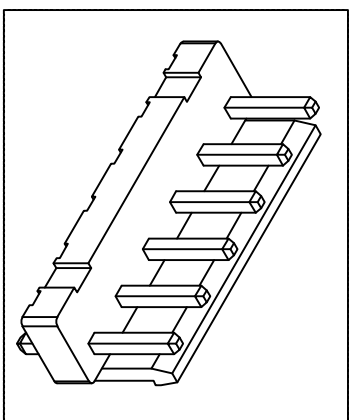

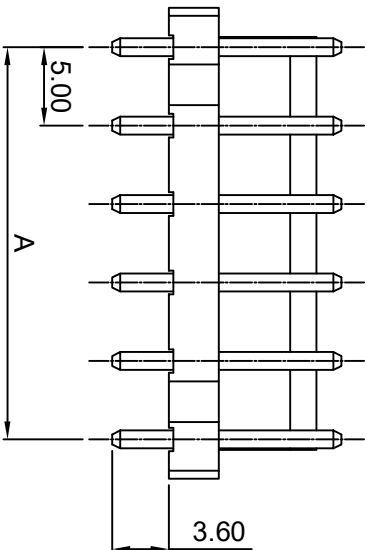


PART NO.  
5001xxWV001  
DWG NO.  
C5001WV

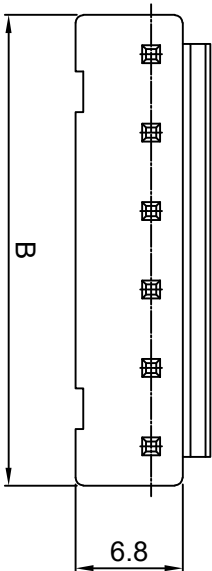

RECOMMENDED PCB LAYOUT  
(PCB THK=1.0~1.6)

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
500102WV001	2	5.00	10.00
500103WV001	3	10.00	15.00
500104WV001	4	15.00	20.00
500105WV001	5	20.00	25.00
500106WV001	6	25.00	30.00

NOTE:

1. Wafer Material: Nylon 66 UL94V-0
2. Pin/Pos Material: brass bronze.
3. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 10A AC/DC.
6. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES  
3 PLACE  $\pm 0.5$   $\pm 0.10$   
2 PLACE  $\pm 1.5$   $\pm 0.25$   
1 PLACE  $\pm 2.0$   $\pm 0.50$   
ANGLE DIM



EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE

SCALE	REV.	PAGE	UNIT	THIRD ANGLE PROJECTION
2/1	A	1	mm	

DWG NO.: C5001WV

PART NO

5001xxWV001

10 9 8 7 6 5 4 3 2 1