
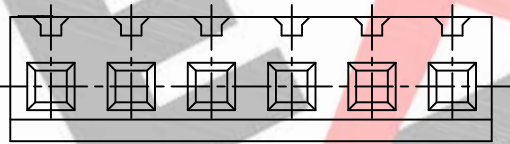
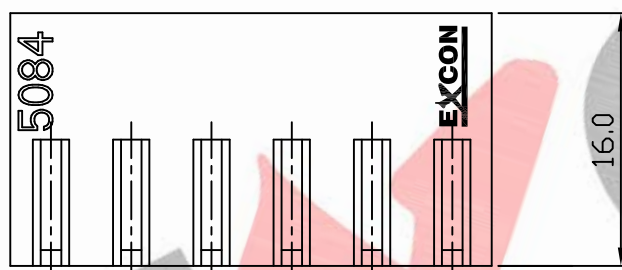
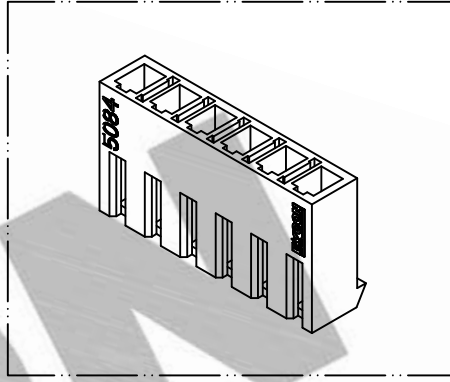


PART NO. 5084xxHA051
 DWG NO. C5084HA

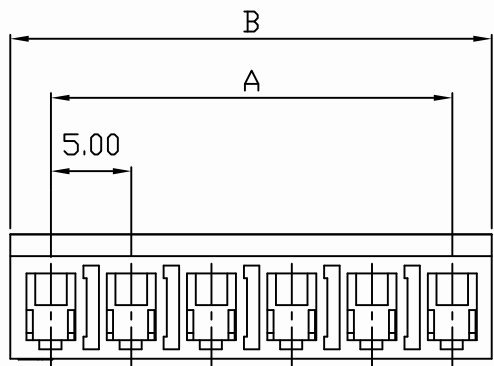

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
508402HA051	2	5.00	10.00
508403HA051	3	10.00	15.00
508404HA051	4	15.00	20.00
508405HA051	5	20.00	25.00
508406HA051	6	25.00	30.00
508407HA051	7	30.00	35.00
508408HA051	8	35.00	40.00
508409HA051	9	40.00	45.00
508410HA051	10	45.00	50.00
508411HA051	11	50.00	55.00
508412HA051	12	55.00	60.00

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ±0.5 ±0.10			
2 PLACE ±1.5 ±0.25			
1 PLACE ±2.0 ±0.50			
ANGLE DIM			
REV.	REVISION		DIS DATE
SCALE	REV.	PAGE:	UNIT mm
2/1	A	1	THIRD ANGLE PROJECTION
DWG NO:			C5084HA

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 5084xxHA051