
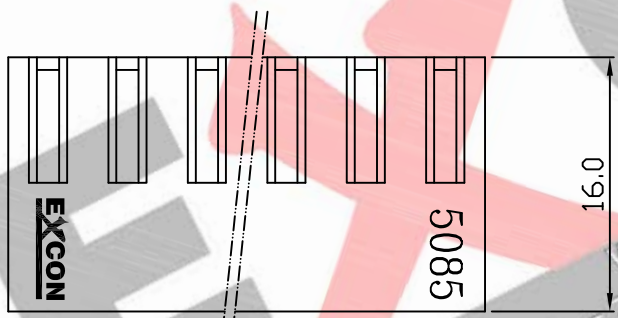
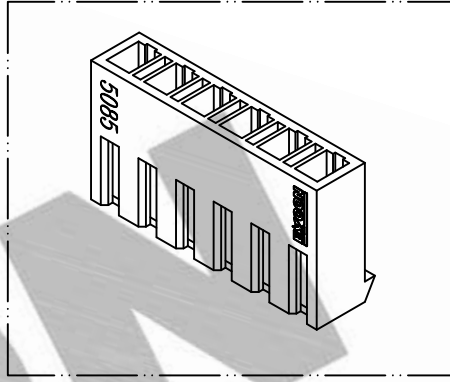


10 9 8 7 6 5 4 3 2 1

PART NO. 5085xxHA051
 DWG NO. C5085HA

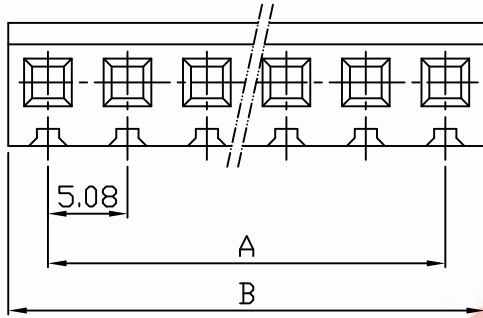

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
508502HA051	2	5.08	9.08
508503HA051	3	10.16	14.88
508504HA051	4	15.24	19.96
508505HA051	5	20.32	25.04
508506HA051	6	25.40	30.12
508507HA051	7	30.48	35.20
508508HA051	8	35.56	40.28
508509HA051	9	40.64	45.36
508510HA051	10	45.72	50.44
508511HA051	11	50.80	55.52
508512HA051	12	55.88	60.60

NOTE:

1. Housing Material: Nylon 66 UL94V2
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		
				1 PLACE ±2.0 ±0.50		PART.NO
				ANGLE DIM		
REV.	REVISIONI			DIS	DATE	PART.NO
SCALE	REV.	PAGE:	UNIT	mm		
2/1	A	1	THIRD ANGLE PROJECTION			
				DWG NO:		5085xxHA051
				C5085HA		

10 9 8 7 6 5 4 3 2 1