
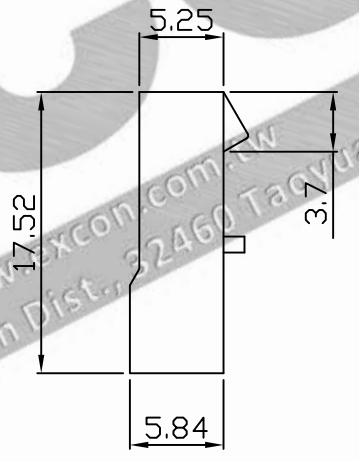
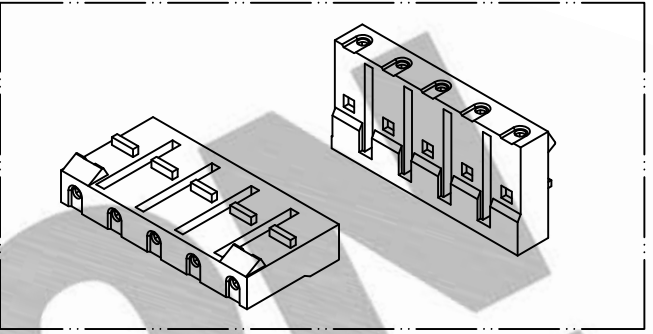


10 9 8 7 6 5 4 3 2 1

PART NO. 5089xxHA001  
 DWG NO. C5089HA

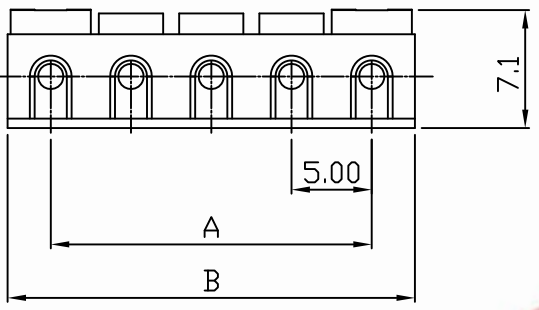

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
508901HA001	1	--	5.38
508902HA001	2	5.00	10.38
508903HA001	3	10.00	15.38
508904HA001	4	15.00	20.38
508905HA001	5	20.00	25.38
508906HA001	6	25.00	30.38
508907HA001	7	30.00	35.38
508908HA001	8	35.00	40.38
508909HA001	9	40.00	45.38
508910HA001	10	45.00	50.38
508911HA001	11	50.00	55.38
508912HA001	12	55.00	60.38
508913HA001	13	60.00	65.38
508914HA001	14	65.00	70.38
508915HA001	15	70.00	75.38

NOTE:

1. Housing Material: Nylon 66 UL94V0
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 9A AC/DC.
5. Voltage rating: 250V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ±0.5 ±0.10			
2 PLACE ±1.5 ±0.25			
1 PLACE ±2.0 ±0.50			
ANGLE DIM			
REV.	REVISION		DIS DATE
SCALE	REV.	PAGE:	UNIT mm
1/1	A	1	THIRD ANGLE PROJECTION

**EXCON**  
 EXCON TECHNOLOGY COMPANY

PART.NO  
 5089xxHA001

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

10 9 8 7 6 5 4 3 2 1