
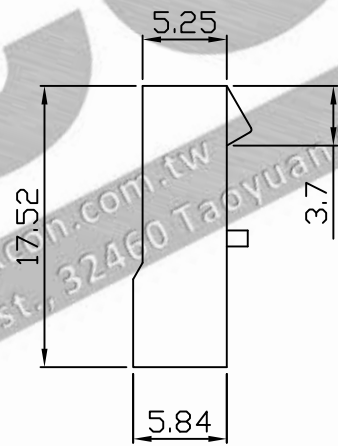
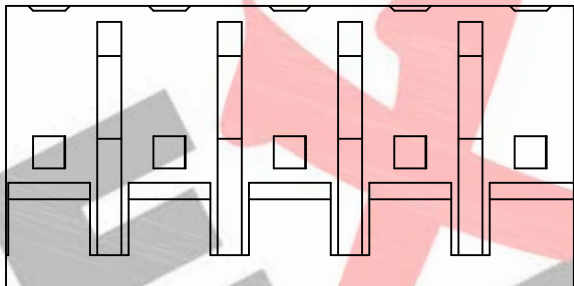
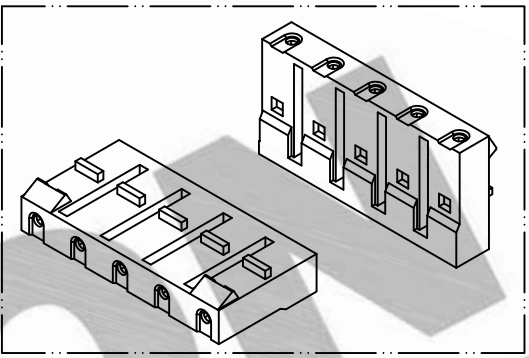


PART NO. 5091xxHA001
 DWG NO. C5091HA

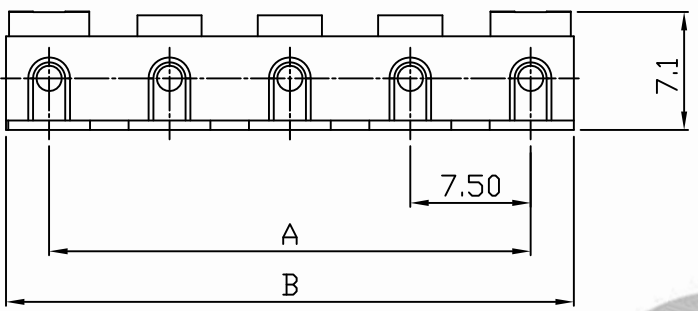

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
509101HA001	1	--	5.38
509102HA001	2	7.50	12.88
509103HA001	3	15.00	20.38
509104HA001	4	22.50	27.88
509105HA001	5	30.00	35.38
509106HA001	6	37.50	42.88
509107HA001	7	45.00	50.38
509108HA001	8	52.50	57.88
509109HA001	9	60.00	65.38
509110HA001	10	67.50	72.88
509111HA001	11	75.00	80.38
509112HA001	12	82.50	87.88
509113HA001	13	90.00	95.38
509114HA001	14	97.50	102.88
509115HA001	15	105.00	110.38

NOTE:

1. Housing Material: Nylon 66 UL94V0
2. Insulation resistance: 1000M ohm/min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 9A AC/DC.
5. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM		 EXCON TECHNOLOGY COMPANY	
REV.	REVISION		DIS	DATE	PART.NO		
SCALE	REV.	PAGE:	UNIT	mm	DWG NO:		PART.NO
2/1	A	1	THIRD ANGLE PROJECTION		C5091HA		