







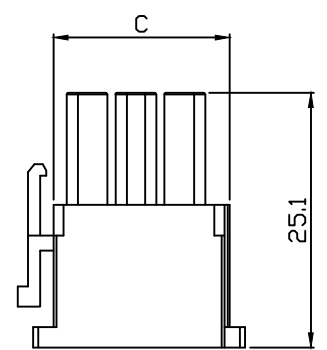
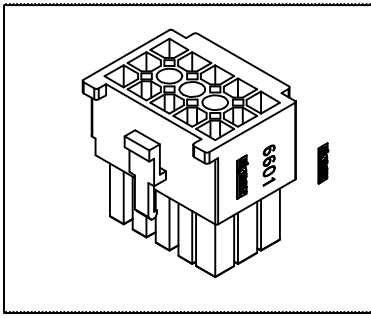



PART NO. 660115HM051
 DWG NO. C6601HM

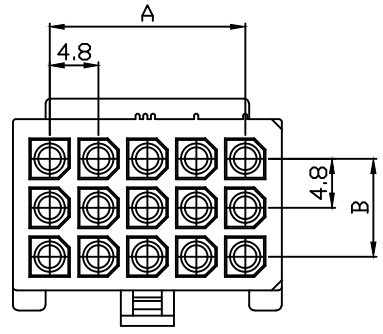

Dimensional & Ordering Information:

NOTE:

1. Housing Material: Nylon 66 UL94V-2
2. Insulation resistance: 1000MΩ /min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660102HM001	2	4.8	--	7.2	12.0
660103HM001	3	9.6	--	7.2	16.8
660104HM001	4	14.4	--	7.2	21.6
660106HM001	6	9.6	4.8	12.0	16.8
660109HM001	9	9.6	9.6	16.8	16.8
660112HM001	12	14.4	9.6	16.8	21.6
660115HM001	15	19.2	9.6	16.8	26.4

REV.		REVISION		DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.35 1 PLACE ±2.0 ±0.50 ANGLE DIM	 EXCON TECHNOLOGY COMPANY
SCALE	REV.	PAGE:	UNIT	MM	DATE		
1/1	A	1/1	THIRD ANGLE PROJECTION			C6601HM	660115HM051