


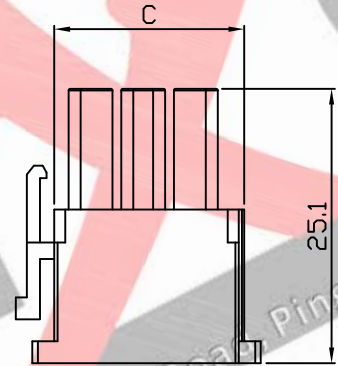
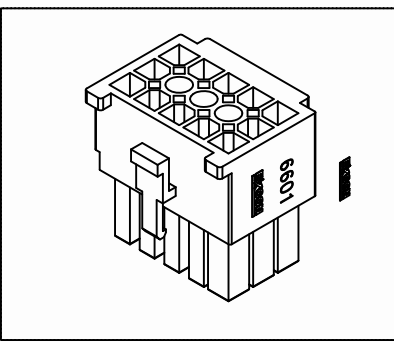
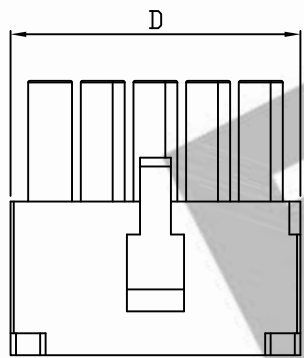



PART NO. 6601xxHM051
 DWG NO. C6601HM

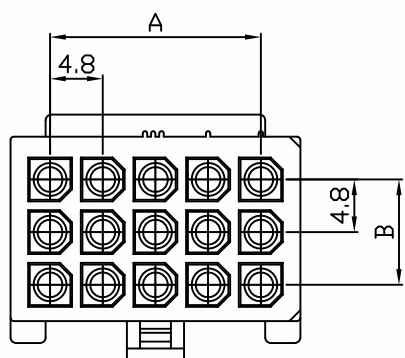


Part No.: 660102HM051




Part No.: 660109HM051




Part No.: 660103HM051




Part No.: 660112HM051



Part No.: 660104HM051



Part No.: 660106HM051



Part No.: 660115HM051

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660102HM051	2	4.8	--	7.2	12.0
660103HM051	3	9.6	--	7.2	16.8
660104HM051	4	14.4	--	7.2	21.6
660106HM051	6	9.6	4.8	12.0	16.8
660109HM051	9	9.6	9.6	16.8	16.8
660112HM051	12	14.4	9.6	16.8	21.6
660115HM051	15	19.2	9.6	16.8	26.4

NOTE:

1. Housing Material: Nylon 66 UL94V-2
2. Insulation resistance: 1000MΩ /min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.35
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

EXCON
 EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE	DWG NO:	PART NO
SCALE	REV.	PAGE	UNIT	THIRD ANGLE PROJECTION	C6601HM
1/1	A	1/1			6601xxHM051