
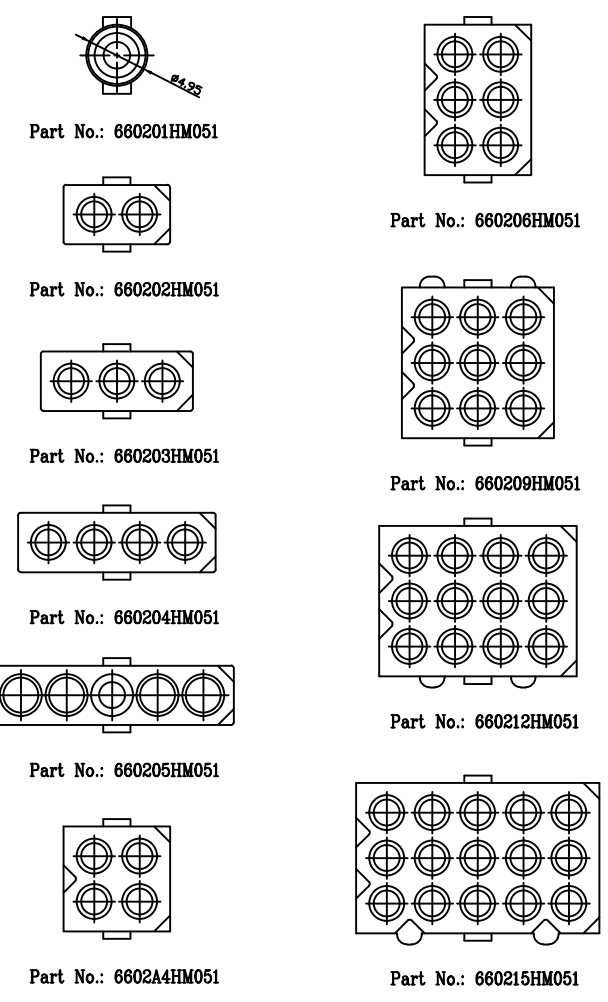
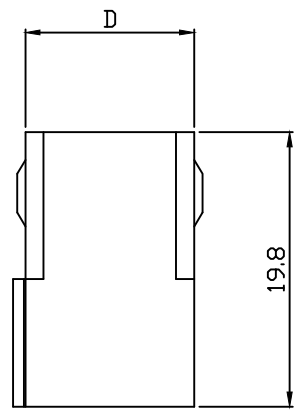
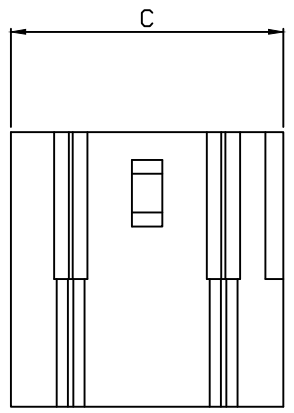
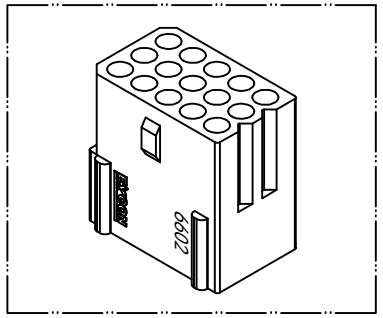


PART NO. 6602xxHM051
 DWG NO. C6602HM

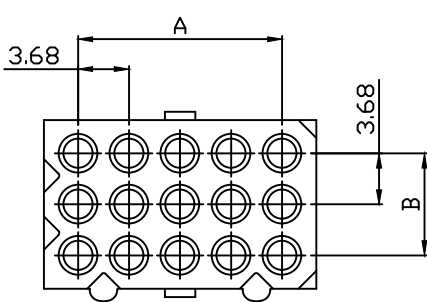

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660201HM051	1	---	---	---	---
660202HM051	2	3.68	---	8.64	4.88
660203HM051	3	7.36	---	12.32	4.88
660204HM051	4	11.04	---	16.0	4.88
660205HM051	5	14.72	---	19.68	4.88
6602A4HM051	4	3.68	3.68	8.64	8.64
660206HM051	6	3.68	7.36	8.64	12.32
660209HM051	9	7.36	7.36	12.32	12.32
660212HM051	12	11.04	7.36	16.0	12.32
660215HM051	15	14.72	7.36	19.68	12.42

NOTE:

1. Housing Material: Nylon 66 UL94V-2
2. Color: Natural
3. Insulation resistance: 1000M_Ω min.
4. Withstand voltage: 1500V AC/minute.
5. Current rating: 5A AC/DC.
6. Voltage rating: 6000V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES				
3 PLACE ±0.5 ±0.10				
2 PLACE ±1.5 ±0.25				
1 PLACE ±2.0 ±0.50				
REV.	REVISION	DIS	DATE	ANGLE DIM
SCALE	REV.	PAGE	UNIT	MM
1/1	A	1/1	THIRD ANGLE PROJECTION	
DWG NO: C6602HM			PART NO: 6602xxHM051	