

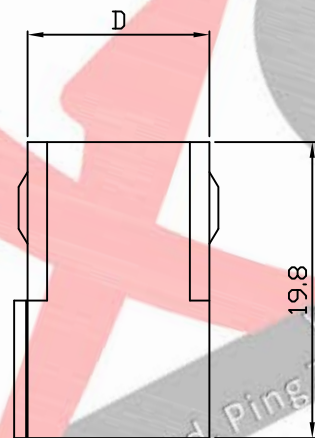
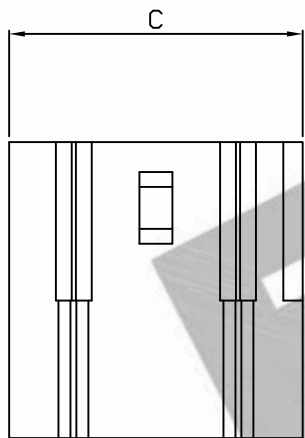
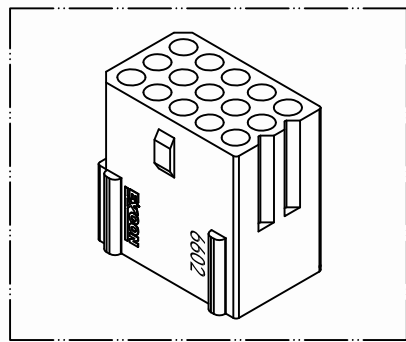



PART NO. 6602xxHM051  
 DWG NO. C6602HM

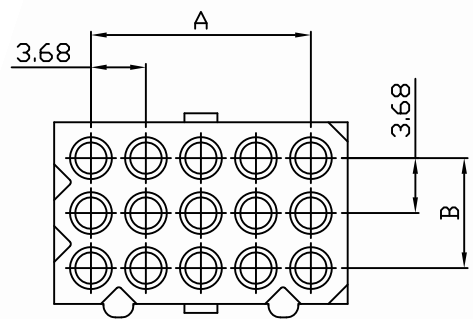


Part No.: 660201HM051



Part No.: 660206HM051



Part No.: 660202HM051




Part No.: 660209HM051




Part No.: 660203HM051




Part No.: 660204HM051




Part No.: 660212HM051



Part No.: 660205HM051



Part No.: 6602A4HM051



Part No.: 660215HM051

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660201HM051	1	--	--	--	--
660202HM051	2	3.68	--	8.64	4.88
660203HM051	3	7.36	--	12.32	4.88
660204HM051	4	11.04	--	16.0	4.88
660205HM051	5	14.72	--	19.68	4.88
6602A4HM051	4	3.68	3.68	8.64	8.64
660206HM051	6	3.68	7.36	8.64	12.32
660209HM051	9	7.36	7.36	12.32	12.32
660212HM051	12	11.04	7.36	16.0	12.32
660215HM051	15	14.72	7.36	19.68	12.42

NOTE:

- Housing Material: Nylon 66 UL94V-2
- Color: Natural
- Insulation resistance: 1000MΩ min.
- Withstand voltage: 1500V AC/minute.
- Current rating: 5A AC/DC.
- Voltage rating: 6000V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 3 PLACE ±0.5 ±0.10  
 2 PLACE ±1.5 ±0.25  
 1 PLACE ±2.0 ±0.50  
 ANGLE DIM

**EXCON**

EXCON TECHNOLOGY COMPANY

REV.	REVISION	DIS	DATE	DWG NO:	PART NO
SCALE	REV.	PAGE	UNIT	THIRD ANGLE PROJECTION	C6602HM
1/1	A	1/1			6602xxHM051