



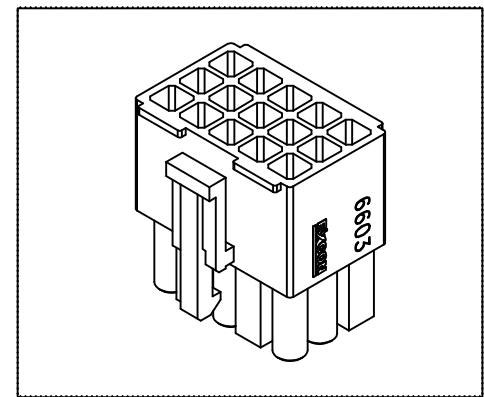
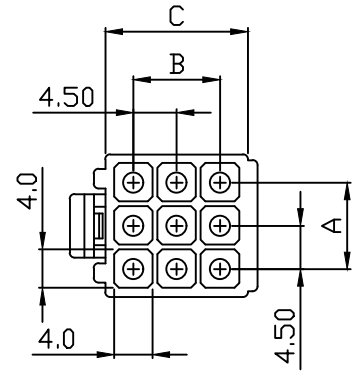



10 9 8 7 6 5 4 3 2 1


PART NO. 6603xxHM051
 DWG NO. C6603HM




Part No.: 660302HM001




Part No.: 660304HM001




Part No.: 660309HM001




Part No.: 660315HM001




Part No.: 660303HM001



Part No.: 660306HM001



Part No.: 660312HM001



Part No.: 660304HM001

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660302HM001	2	4.5	---	5.6	10.3
660303HM001	3	9.0	---	5.6	14.8
660304HM001	4	13.5	---	5.6	19.3
660304HM001	4	4.5	4.5	10.3	10.3
660306HM001	6	9.0	4.5	10.3	14.8
660309HM001	9	9.0	9.0	14.8	14.8
660312HM001	12	13.5	9.0	14.8	19.3
660315HM001	15	18.0	9.0	14.8	23.8

NOTE:

1. Housing Material: Nylon 66 UL94V-0
2. Insulation resistance: 1000MΩ /min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



REV.	REVISION			DIS	DATE	DWG NO: C6603HM	PART.NO 6603xxHM051
SCALE	REV.	PAGE:	UNIT	m			
NONE	B	1	THIRD ANGLE PROJECTION				

10 9 8 7 6 5 4 3 2 1