









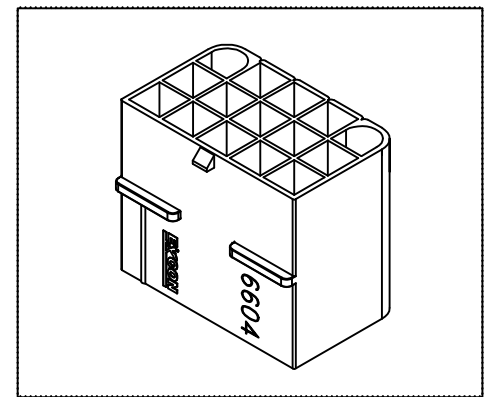



10 9 8 7 6 5 4 3 2 1

PART NO. 6604xxHF051
 DWG NO. C6604HF

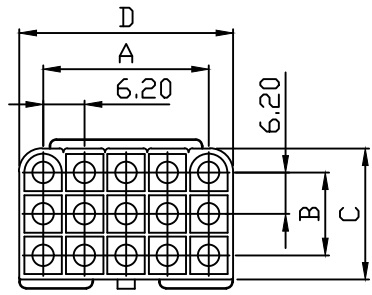

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660401HF051	1	---	---	7.0	7.0
660402HF051	2	6.2	---	7.2	13.4
660403HF051	3	12.4	---	7.2	19.6
660404HF051	4	18.6	---	7.2	25.8
660404HF051	4	6.2	6.2	13.4	13.4
660406HF051	6	12.4	6.2	13.4	19.6
660409HF051	9	12.4	12.4	19.6	19.6
660412HF051	12	18.6	12.4	19.6	25.8
660415HF051	15	24.8	12.4	19.6	32.0

- NOTE:
- Housing Material: Nylon 66 UL94V-0
 - Insulation resistance: 1000MΩ /min.
 - Withstand voltage: 1500V AC/minute.
 - Current rating: 5A AC/DC.
 - Voltage rating: 300V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		EXCON EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		PART.NO
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		6604xxHF051
REV.	REVISION		DIS	DATE		
SCALE	REV.	PAGE:	UNIT	mm		DWG NO: C6604HF
NONE	B	1	THIRD ANGLE PROJECTION			

10 9 8 7 6 5 4 3 2 1