









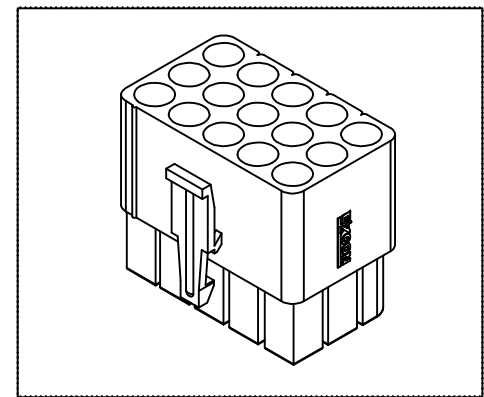



10 9 8 7 6 5 4 3 2 1

PART NO. 6604xxHM051  
 DWG NO. C6604HM

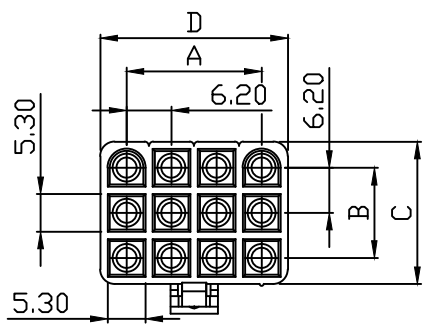

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660402HM051	2	6.2	--	7.2	13.4
660403HM051	3	12.4	--	7.2	19.6
660404HM051	4	18.6	--	7.2	25.8
660406HM051	4	6.2	6.2	13.4	13.4
660406HM051	6	12.4	6.2	13.4	19.6
660409HM051	9	12.4	12.4	19.6	19.6
660412HM051	12	18.6	12.4	19.6	25.8
660415HM051	15	24.8	12.4	19.6	32.0

NOTE:

1. Housing Material: Nylon 66 UL94V-0
2. Insulation resistance: 1000MΩ /min.
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 300V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES		<b>EXCON</b> EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		PART.NO
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		6604xxHM051
REV.	REVISION		DIS	DATE		
SCALE	REV.	PAGE	UNIT	mm		DWG NO: C6604HM
NONE	B	1	THIRD ANGLE PROJECTION			

10 9 8 7 6 5 4 3 2 1