




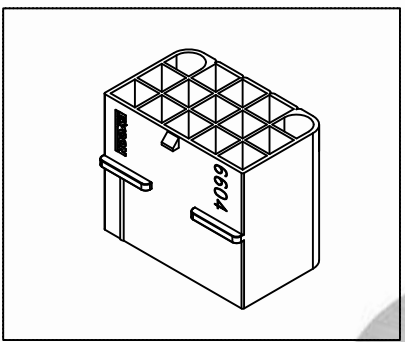


PART NO. 6604xxHF051
 DWG NO. C6604HF

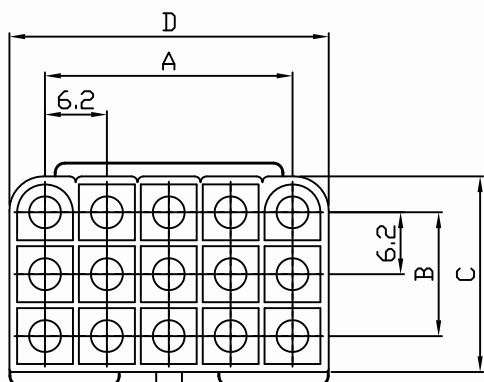


Part No.: 660401HF051




Part No.: 660406HF051




Part No.: 660402HF051




Part No.: 660409HF051




Part No.: 660403HF051




Part No.: 660412HF051



Part No.: 660404HF051



Part No.: 660404HF051



Part No.: 660415HF051

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660401HF051	1	--	--	7.1	7.1
660402HF051	2	6.2	--	7.3	13.8
660403HF051	3	12.4	--	7.3	20.0
660404HF051	4	18.6	--	7.3	26.2
6604A4HF051	4	6.2	6.2	13.6	13.8
660406HF051	6	12.4	6.2	13.6	20.0
660409HF051	9	12.4	12.4	20.3	20.0
660412HF051	12	18.6	12.4	20.3	26.2
660415HF051	15	24.8	12.4	20.3	32.4

NOTE:

- Housing Material: Nylon 66 UL94V2
- Insulation resistance: 1000MΩ min.
- Withstand voltage: 1500V AC/minute.
- Current rating: 5A AC/DC.
- Voltage rating: 300V AC/DC
- Color: Natural

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.35		
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		
SCALE	REV.	PAGE	UNIT	DATE	DWG NO:	PART NO
1/1	A	1/1	THIRD ANGLE PROJECTION		C6604HF	6604xxHF051