

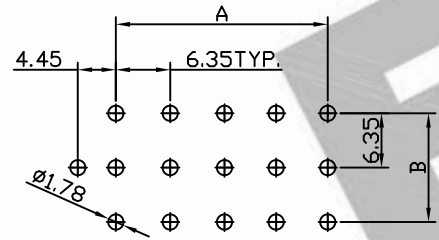
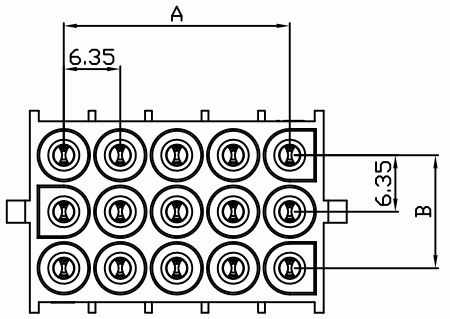
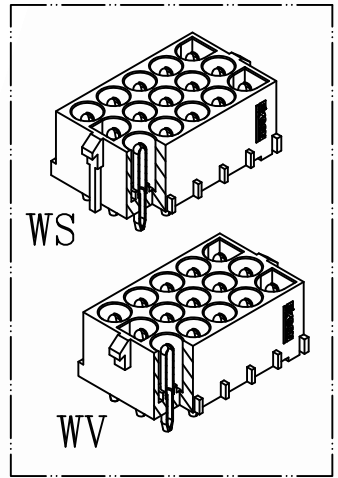



PART NO. 6605xxWS051
 DWG NO. C6605WS



RECOMMENDED PCB LAYOUT
 (PCB THK=1.0~1.6)
 * Only for 6605xxWP051

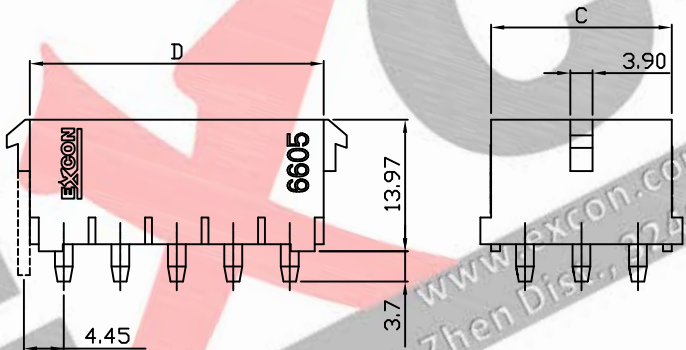

660502WS051




660503WS051




660504WS051




660505WS051




660506WS051



660509WS051



660512WS051

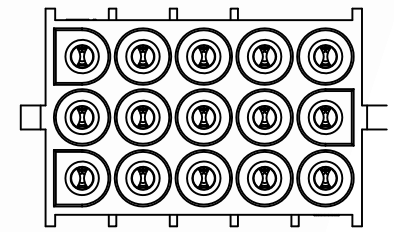

660515WS051

Dimensional & Ordering Information:

Part No.		Circuits	Dim A	Dim B	Dim C	Dim D
With peg	Without peg					
660502WS051	660502WV051	2	6.35	--	7.62	13.97
660503WS051	660503WV051	3	12.70	--	7.62	20.32
660504WS051	660504WV051	4	19.05	--	7.62	26.67
660505WS051	660505WV051	5	25.04	--	7.62	33.02
6605A6WS051	6605A6WV051	6	6.35	12.7	20.32	13.97
660509WS051	660509WV051	9	12.70	12.7	20.32	20.32
660512WS051	660512WV051	12	19.05	12.7	20.32	26.67
660515WS051	660515WV051	15	25.4	12.7	20.32	33.02

- NOTE:**
- Housing Material: Nylon 66 UL94V2
 - Color: Natural
 - Withstand voltage: 5000V AC/minute.
 - Current rating: 5A AC/DC.
 - Voltage rating: 600V AC/DC

REV.	REVISION	DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	 EXCON TECHNOLOGY COMPANY
SCALE	REV.	PAGE	UNIT		
1/1	A	1	THIRD ANGLE PROJECTION	C6605WS	PART.NO 6605xxWS051