

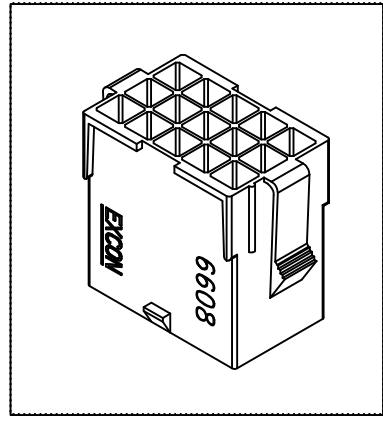





10 9 8 7 6 5 4 3 2 1

PART NO. 6608xxHP051
 DWG NO. C6608HP


F
 E
 D
 C
 B
 A

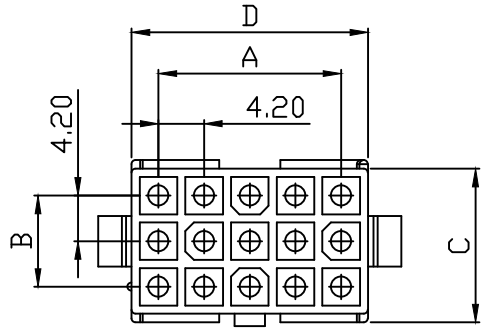


Part No.: 660803HP051




Part No.: 660804HP051




Part No.: 660802HP051




Part No.: 660806HP051



Part No.: 660809HP051



Part No.: 660812HP051



Part No.: 660815HP051

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660802HP051	2	--	4.2	12.4	5.6
660803HP051	3	--	8.4	16.6	5.6
660804HP051	4	4.2	4.2	12.4	9.8
660806HP051	6	8.4	4.2	12.4	14.0
660809HP051	9	13.4	13.4	16.6	14.0
660812HP051	12	12.6	8.4	16.6	18.2
660815HP051	15	16.8	8.4	16.6	22.4

NOTE:

1. Housing Material: Nylon 66 UL94V2 or V0
2. Color: Natural
3. Withstand voltage: 1500V AC/minute.
4. Current rating: 5A AC/DC.
5. Voltage rating: 600V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.25
 1 PLACE ±2.0 ±0.50
 ANGLE DIM



REV.	REVISION	DIS	DATE
SCALE	REV.	PAGE:	UNIT
NONE	B	1	mm

DWG NO:
 C6608HP

PART.NO
 6608xxHP051

10 9 8 7 6 5 4 3 2 1