
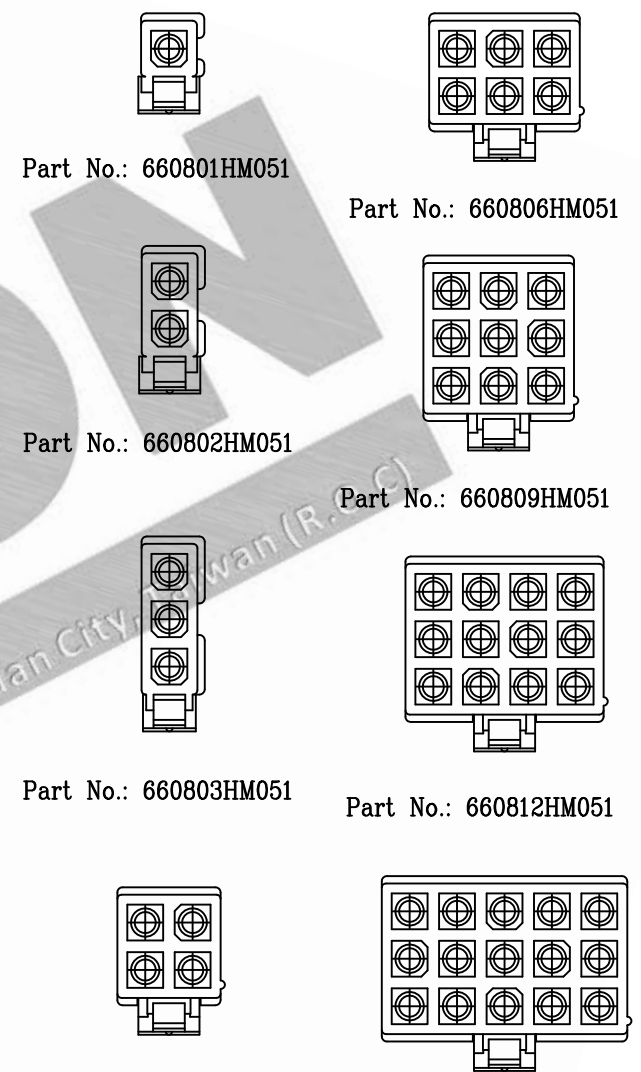
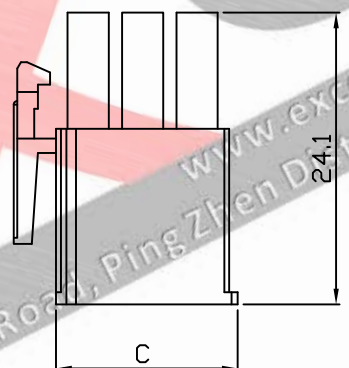

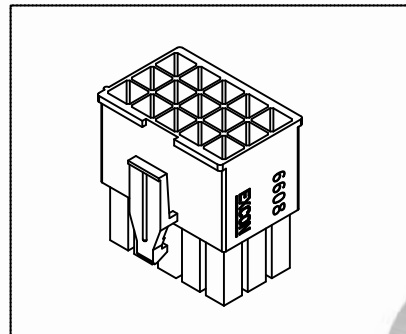


PART NO. 6608xxHM051
 DWG NO. C6608HM

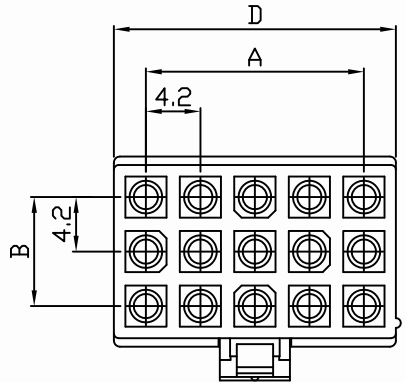

Dimensional & Ordering Information:

| Part No. | Circuits | Dim A | Dim B | Dim C | Dim D |
|-------------|----------|-------|-------|-------|-------|
| 660801HM051 | 1 | --- | --- | 6.6 | 5.8 |
| 660802HM051 | 2 | --- | 4.2 | 10.8 | 5.8 |
| 660803HM051 | 3 | --- | 8.4 | 15.0 | 5.8 |
| 660804HM051 | 4 | 4.2 | 4.2 | 10.8 | 9.8 |
| 660806HM051 | 6 | 8.4 | 4.2 | 10.8 | 14.0 |
| 660809HM051 | 9 | 13.4 | 13.4 | 15.0 | 14.0 |
| 660812HM051 | 12 | 12.6 | 8.4 | 15.0 | 18.2 |
| 660815HM051 | 15 | 16.8 | 8.4 | 15.0 | 22.4 |

- NOTE:
1. Housing Material: Nylon 66 UL94V2
 2. Color: Natural
 3. Withstand voltage: 1500V AC/minute.
 4. Current rating: 5A AC/DC.
 5. Voltage rating: 600V AC/DC

Part No.: 660804HM051 Part No.: 660815HM051

| | | | | | | |
|-------|------|------|------------------------|------|---------|-------------|
| SCALE | REV. | PAGE | UNIT | DATE | DWG NO: | PART.NO |
| 1/1 | A | 1/1 | THIRD ANGLE PROJECTION | | C6608HM | 6608xxHM051 |

UNLESS OTHERWISE SPECIFIED TOLERANCES
 3 PLACE ±0.5 ±0.10
 2 PLACE ±1.5 ±0.35
 1 PLACE ±2.0 ±0.50
 ANGLE DIM

