
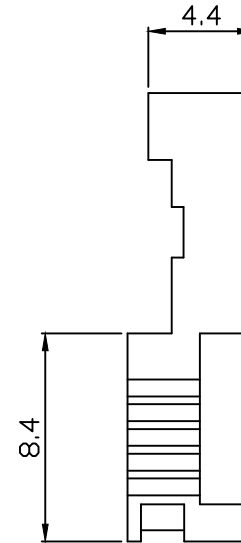
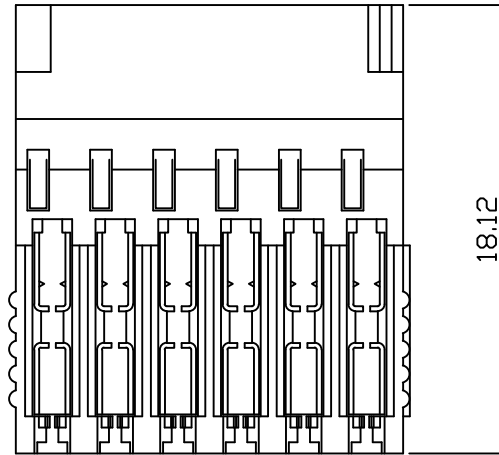
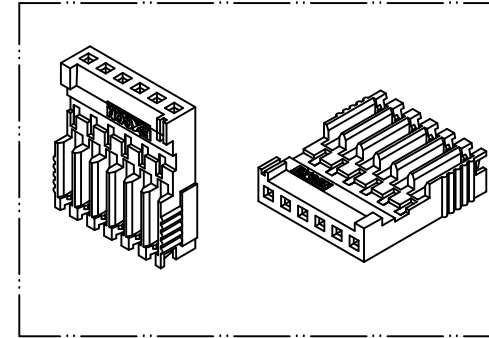


PART NO. 7803xxHA051
 DWG NO. C7803HA

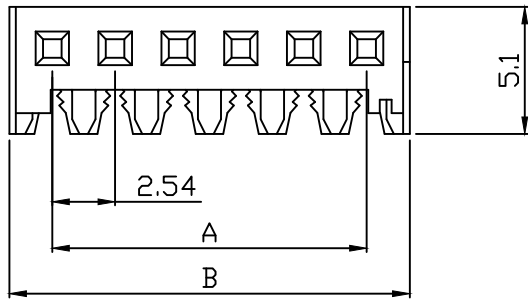

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
780302HA051	2	2.54	5.08
780303HA051	3	5.08	7.62
780304HA051	4	7.62	10.16
780305HA051	5	10.16	12.70
780306HA051	6	12.70	15.24
780307HA051	7	15.24	17.78
780308HA051	8	17.78	20.32
780309HA051	9	20.32	22.86
780310HA051	10	22.86	25.40
780311HA051	11	25.40	27.94
780312HA051	12	27.94	30.48
780313HA051	13	30.48	33.02
780314HA051	14	33.02	35.56
780315HA051	15	35.56	38.10
780316HA051	16	38.10	40.64
780317HA051	17	40.64	43.18
780318HA051	18	43.18	45.72
780319HA051	19	45.72	48.26
780320HA051	20	48.26	50.80
780321HA051	21	50.80	53.34
780322HA051	22	53.34	55.88
780323HA051	23	55.88	58.42
780324HA051	24	58.42	60.96
780325HA051	25	60.96	63.50
780326HA051	26	63.50	66.04
780327HA051	27	66.04	68.58
780328HA051	28	68.58	71.12

NOTE:

1. Housing Material: Nylon 66 UL94V-0
2. Color: Nautral
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 1500V AC/minute.
5. Current retang: 3A AC/DC.
7. Voltage rating: 250V AC/DC
8. Use wire: AWG 24~26

				UNLESS OTHERWISE SPECIFIED TOLERANCES		 EXCON TECHNOLOGY COMPANY
				3 PLACE ±0.5 ±0.10		
				2 PLACE ±1.5 ±0.25		
				1 PLACE ±2.0 ±0.50		
				ANGLE DIM		
REV.	REVISIONI			DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm		DWG NO:
4/1	A	1	THIRD ANGLE PROJECTION			C7803HA
					PART.NO	
					7803xxHA051	